

## STAROS KIOSKMODE 10.3

User Manual


Copyright © 2023 Glory Star Group Limited. All Rights Reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, including, but not limited to, electronic, magnetic, optical, chemical, manual, or otherwise without prior written permission of Glory Star Group Limited.

**DISCLAIMER:** The information in this document is subject to change without notice. Glory Star Group and its affiliates make no representations or warranties with respect to the contents herein and specifically disclaim any implied warranties of merchantability or fitness for a particular purpose. Glory Star reserves the right to revise this publication and to make changes from time to time in the content thereof without obligation of Glory Star to notify any person of such revisions or changes. Glory Star, Glory Star logo, STAR CONTROL, and STAROS are either trademarks or registered trademarks of Glory Star Group Limited. All other trademarks are the property of their respective owners.

# CONTENTS

PRODUCT OVERVIEW .....	2
Features .....	3
Getting Started .....	4
Navigating the App .....	7
SELECTING DISPLAY MODES .....	8
Media Player Mode .....	9
Full Screen Browser/Browser Mode .....	10
App Mode .....	11
Multiple Apps Mode .....	11
CONFIGURING THE DISPLAY SETTINGS .....	12
Installing Staros Updates .....	13
Installing Firmware Updates .....	13
Selecting a Language .....	14
Unlocking Staros .....	14
Importing or Exporting Photos and Videos .....	15
Setting the Time .....	16
Installing Apps and APK Files .....	17
Setting Star Control Initiation Timeout .....	17
Scheduling Display Startup and Shutdown .....	18
Registering Device to Star Control .....	20
Creating an Admin Account .....	21
Updating PIN .....	21
Displaying a Screensaver .....	22
Updating Apps .....	23
Removing Staros .....	24
Installing Star Tool .....	25
Enabling Remote Display .....	25
CONTACT US .....	26

# PRODUCT OVERVIEW

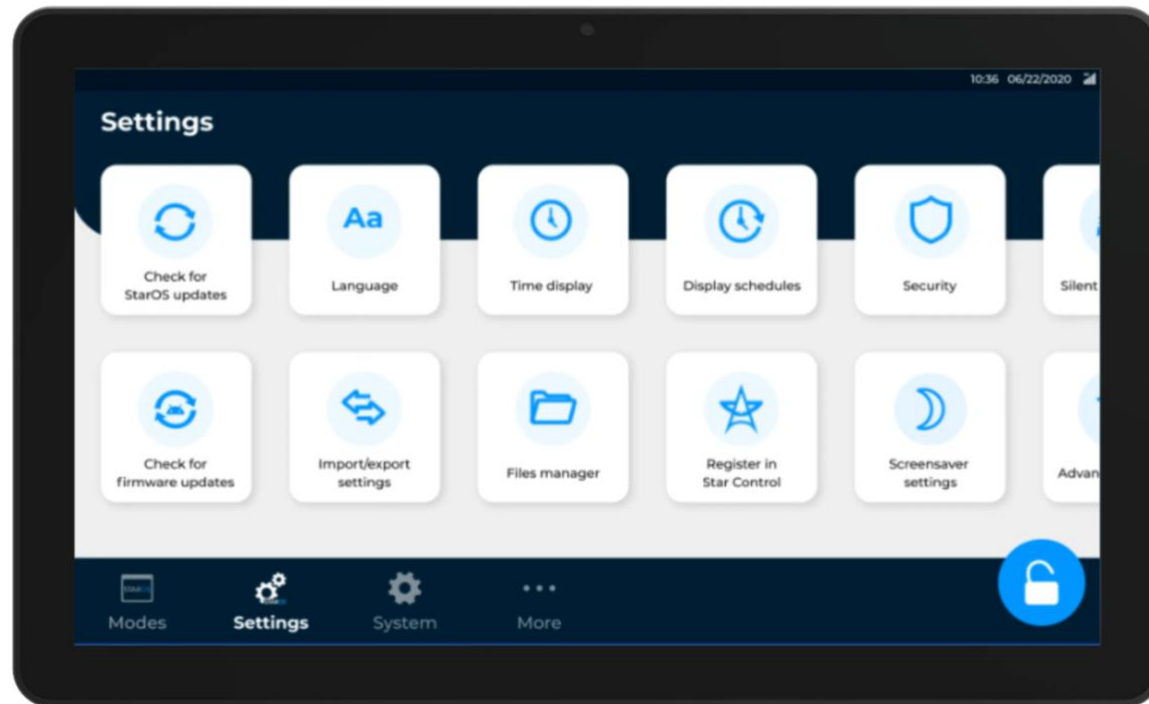

The STAROS application combines a high level of customization with a no-fuss experience for business owners who want to save time and money. The application allows devices to switch between tablet application modes, web pages, and playing media all within one UI. The custom lockdown application protects your information while streamlining all device activities into one simple process and integrates seamlessly to all businesses.

Using the STAROS app, you can do any of the following:

- Launch one or multiple apps, and switch apps with a click of a button.
- Set auto restart, daily startup, and shutdown schedules.
- Play photos, videos, or both when no app is launched – free advertising!
- Set the device to automatically lock within seconds if no user activity has been detected.
- Register device to Star Control.

## Features



### Connects to Star Control

Designed for compatibility with Star Control.



### Display schedules

Sets auto restart, daily startup, and shutdown schedules.




### App and multi app mode

Launches one or multiple apps and switches apps with a click of a button.



### Auto lock down

Locks display automatically within seconds if no user activity has been detected.



### Browser and media mode

Plays photos, videos, or both when no app is launched - free advertising!


# Getting Started

To get started with Staros, perform the following steps:


1. From the Welcome screen, select **Get Started**.




2. Set the **date** and **time**, or select a **time zone** for a more accurate date and time. You can also enable the 24-hour format to display time.

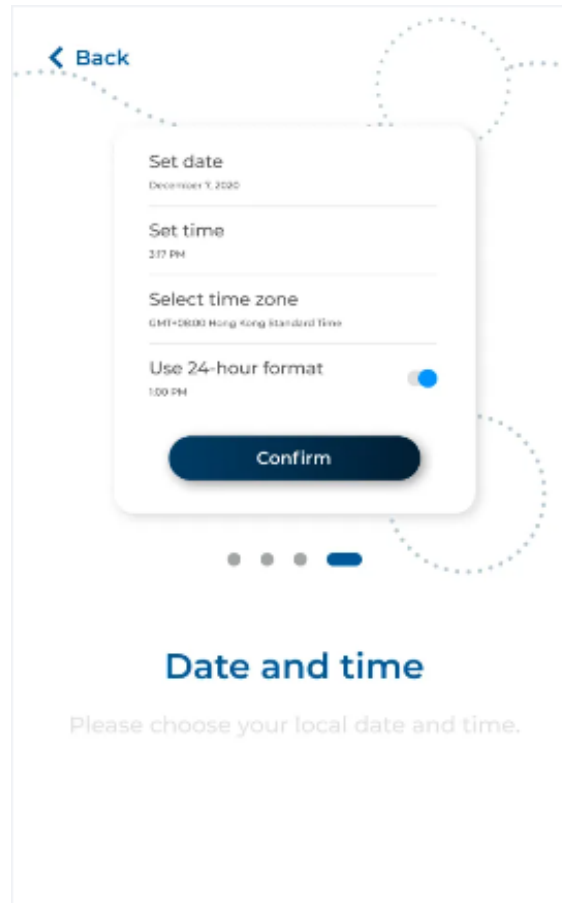


3. Select a Wi-Fi or Ethernet connection.  
**NOTE:** To connect to a Wi-Fi connection, the LAN cable must be disconnected from the Ethernet port.

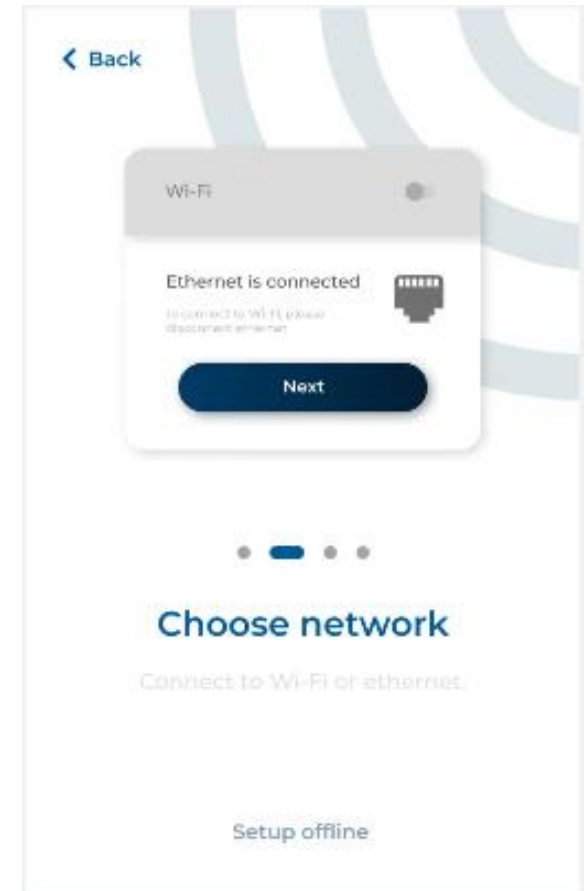


4. To connect to Wi-Fi connection, select the **network**, enter the **password**, and then select **Connect**.

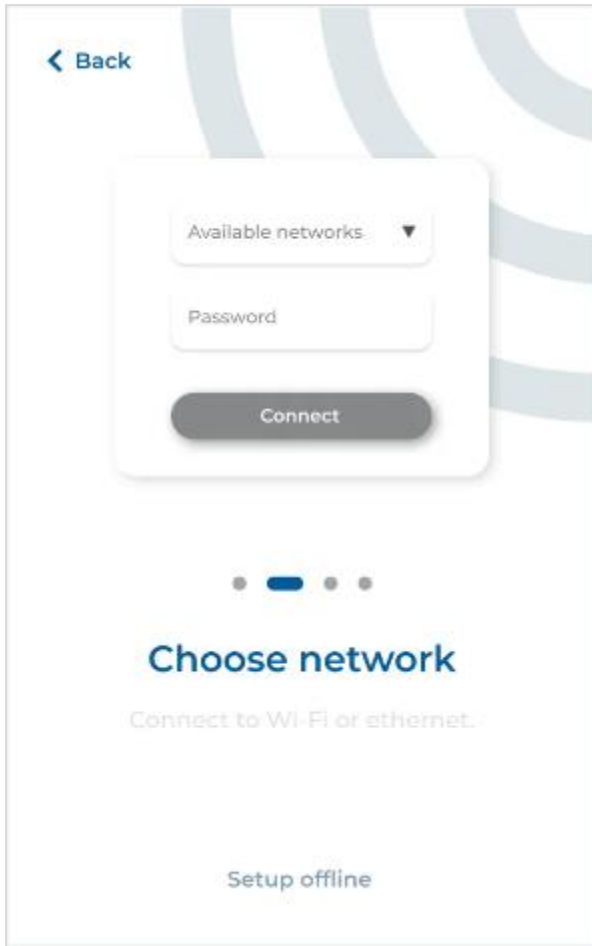



5. To register the device to Star Control, select **Enter PIN** or **Admin login**. If you do not want to register the device, select **Skip for now**.

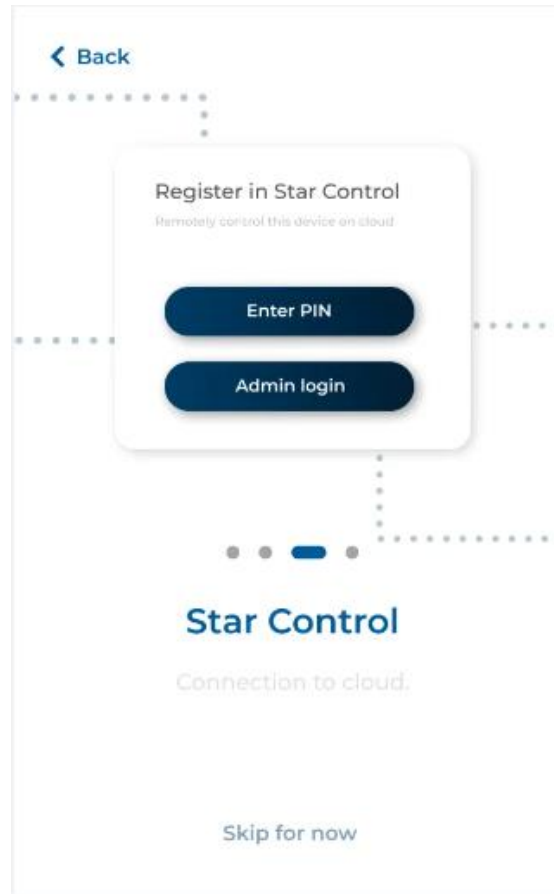

6. Enter the **PIN** generated from Star Control or enter the **login email** and **password** of admin.  
7. Select **Confirm** to register the device.  
8. Once onboarding is completed, select **Continue**.

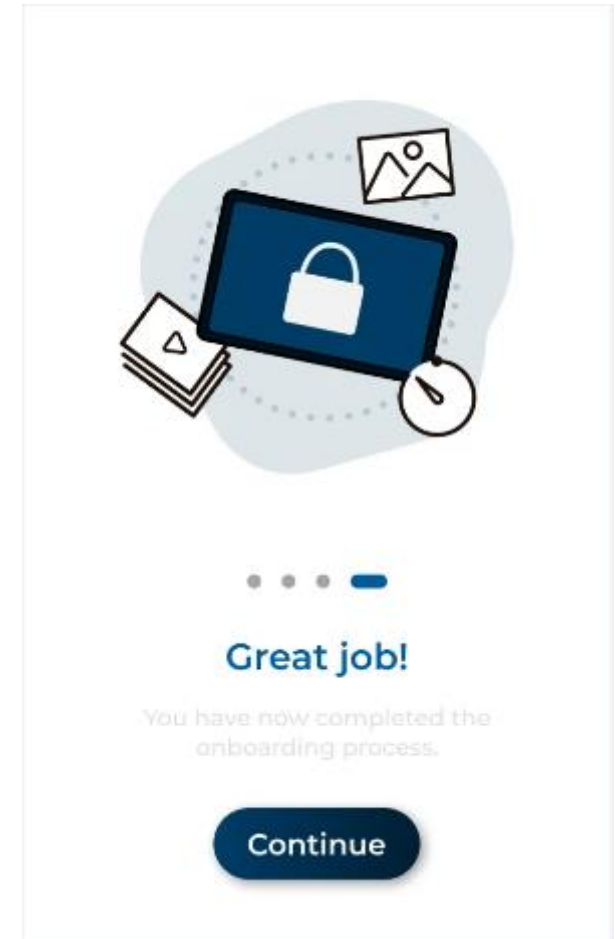


9. To log into Staros, tap screen to unlock, and then enter your **PIN** or the **0000** default PIN.

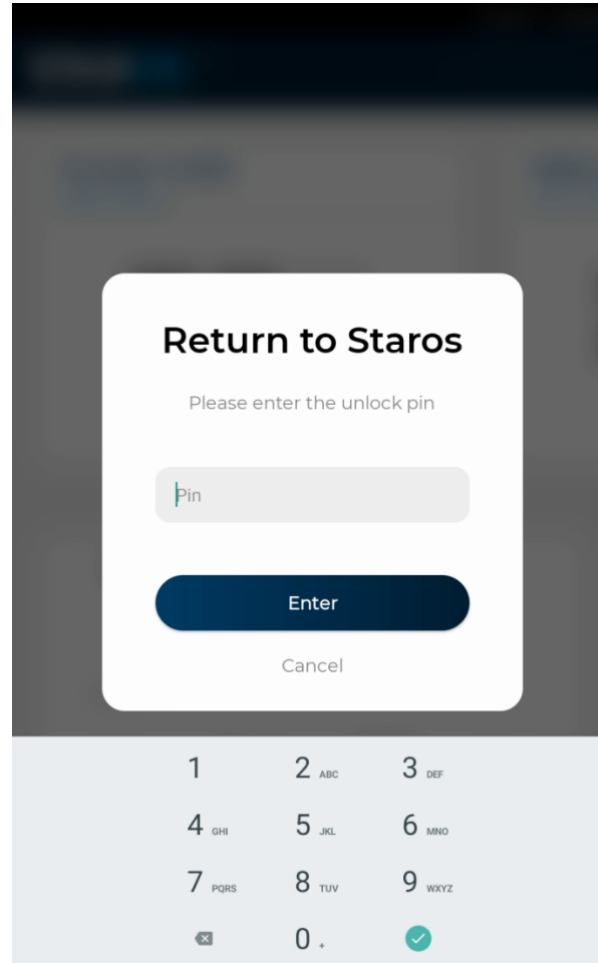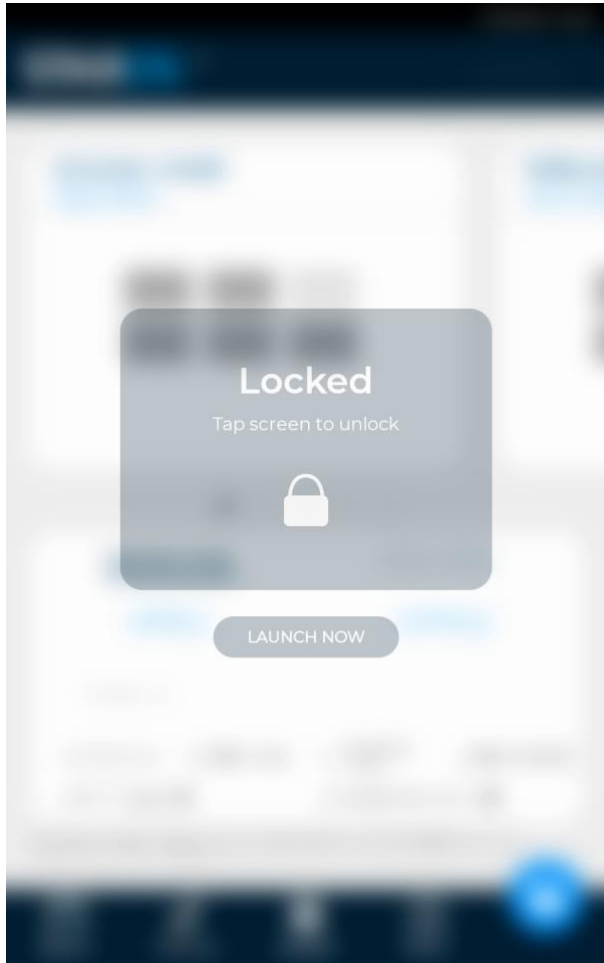




## Navigating the App

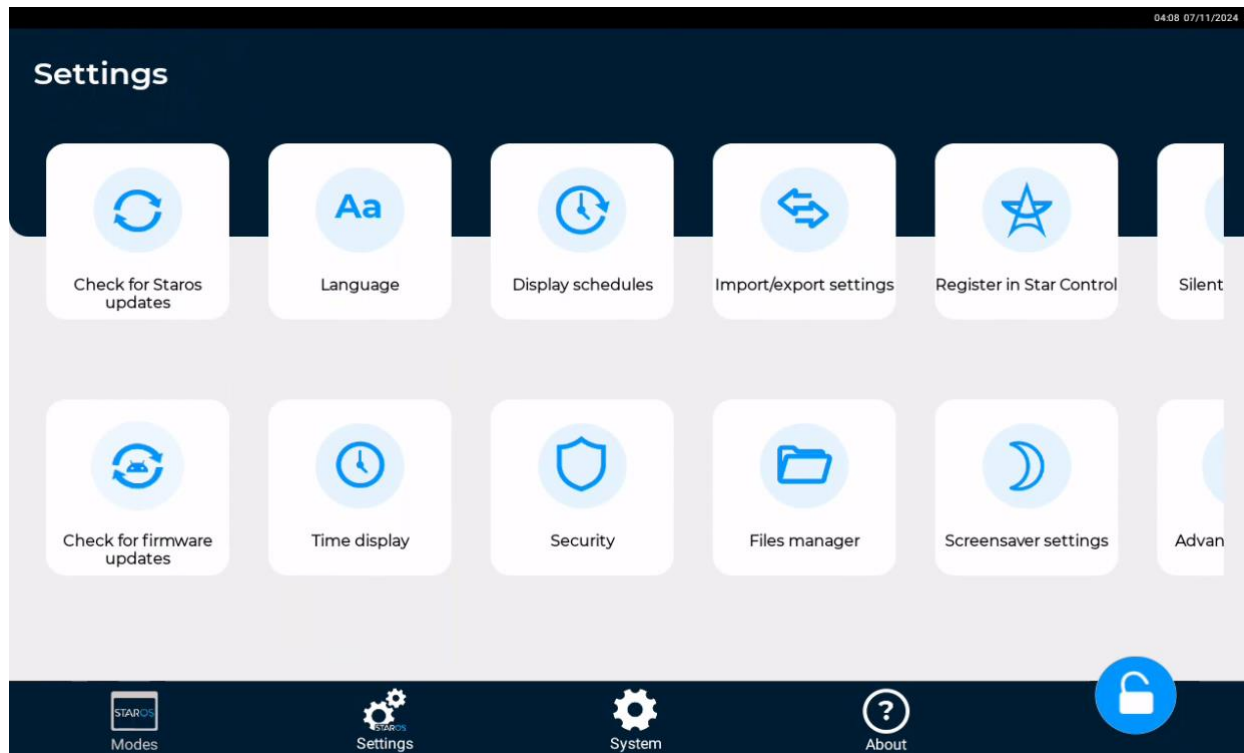

You can easily navigate the Staros app by scrolling left to right, or up and down. The bottom navigation pane allows you to perform the following tasks:

- **Modes** –select specific content to display or set different modes for the display.
- **Settings** –set the language, time, display schedule, screensaver, and security settings, check for updates, and register to Star Control.
- **More** – install Star Tool or restart the app.

# SELECTING DISPLAY MODES

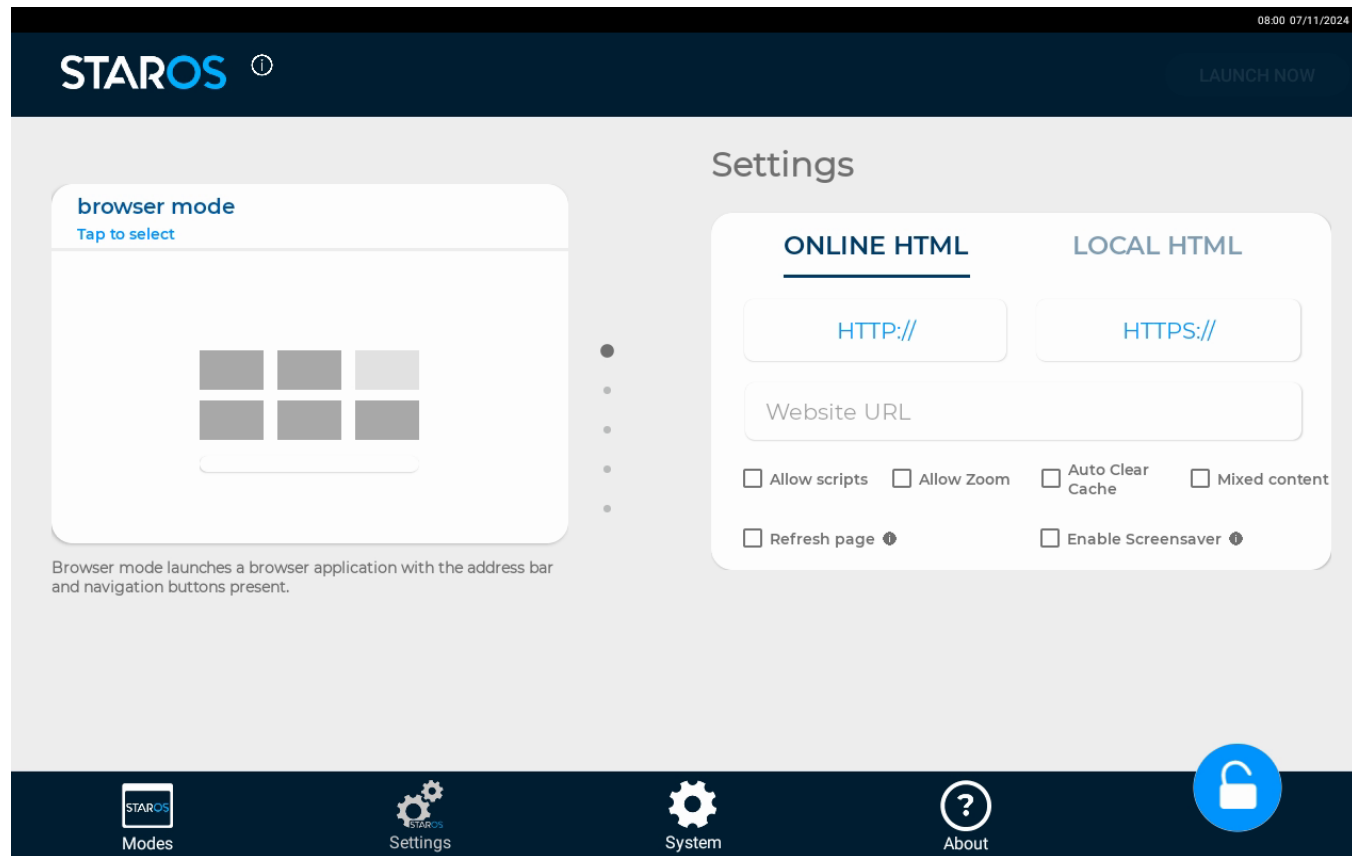


The Staros app allows you to select a content to display or set the following modes in the display:

- **Media player mode** – create playlists of videos or photos to stream.
- **Browser mode** – launch a website in a browser application with customers able to access the address bar and navigation buttons.
- **Full screen browser mode** – launch a website with the address bar and navigation buttons hidden.
- **App mode** – run a single app while the device is in lockdown.
- **Multiple apps mode** – run multiple apps and switch between apps while device is in lockdown.


## Media Player Mode

To select the photos or videos that display on the device, follow these steps:


1. Select **Modes**, scroll to the right, and then select **media player mode**.
2. Select **Choose Media**.

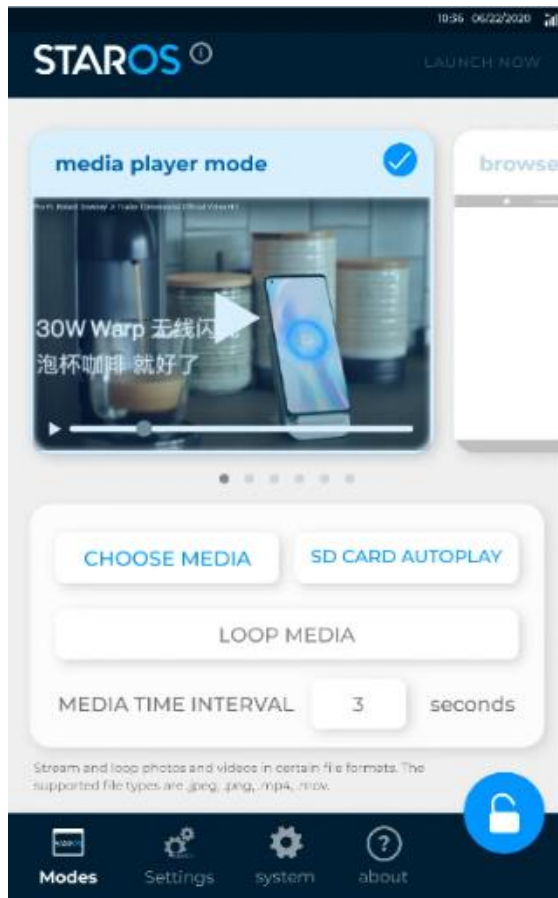

3. Select the storage device where photos or videos are saved.


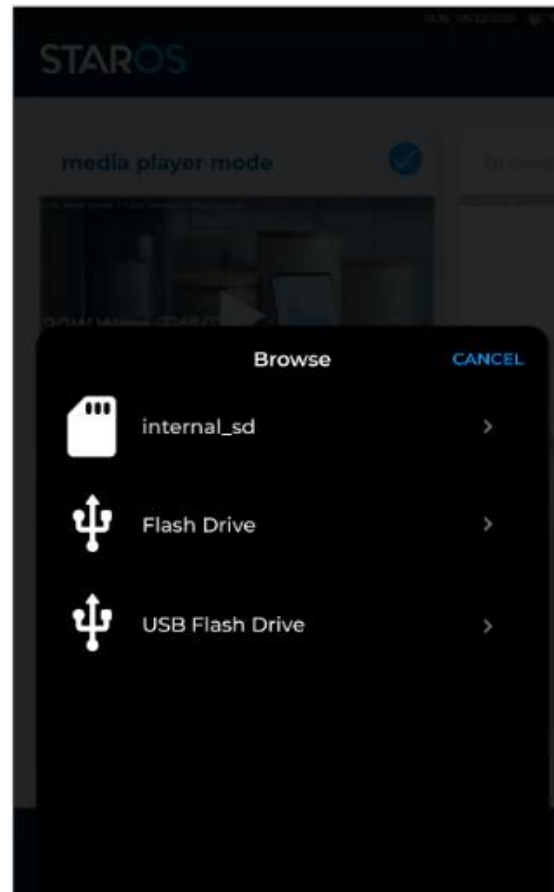


4. Select photos or videos to add, and then select **Confirm**.

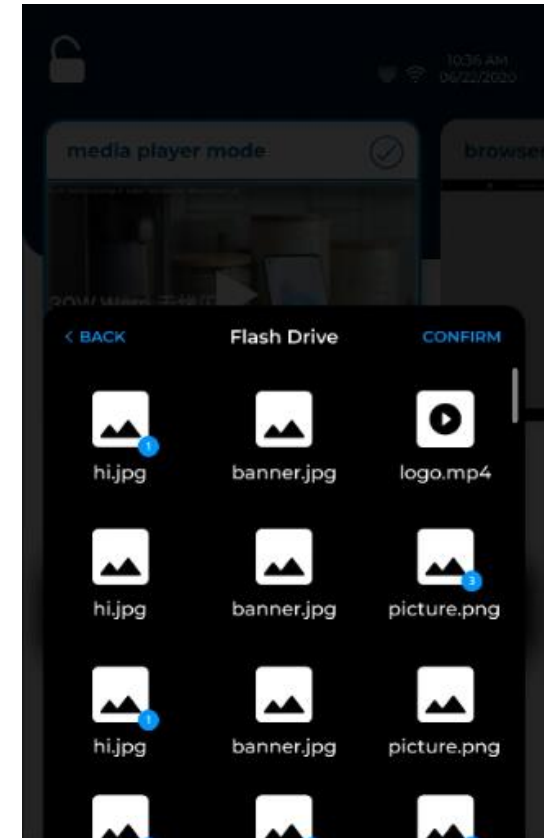

5. Select **Edit Selection** to add or remove photos or videos from the playlist, and then select **Done**.
6. Select **SD Card Auto Play** to automatically play the selected playlist.
7. Set the **Media Time Interval** in seconds.
8. Select **Launch Now** to play the looped photos or videos.

## Full Screen Browser/Browser Mode

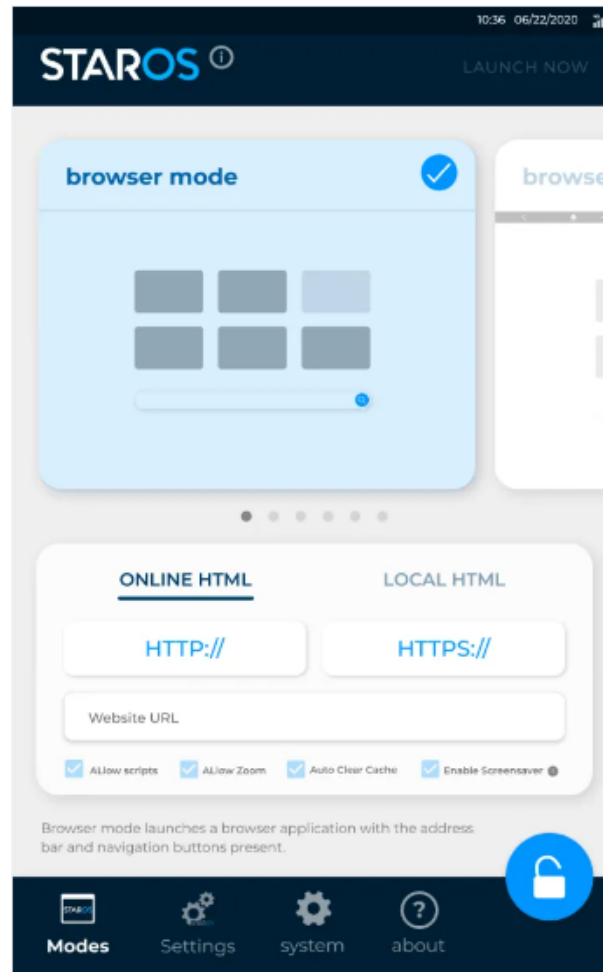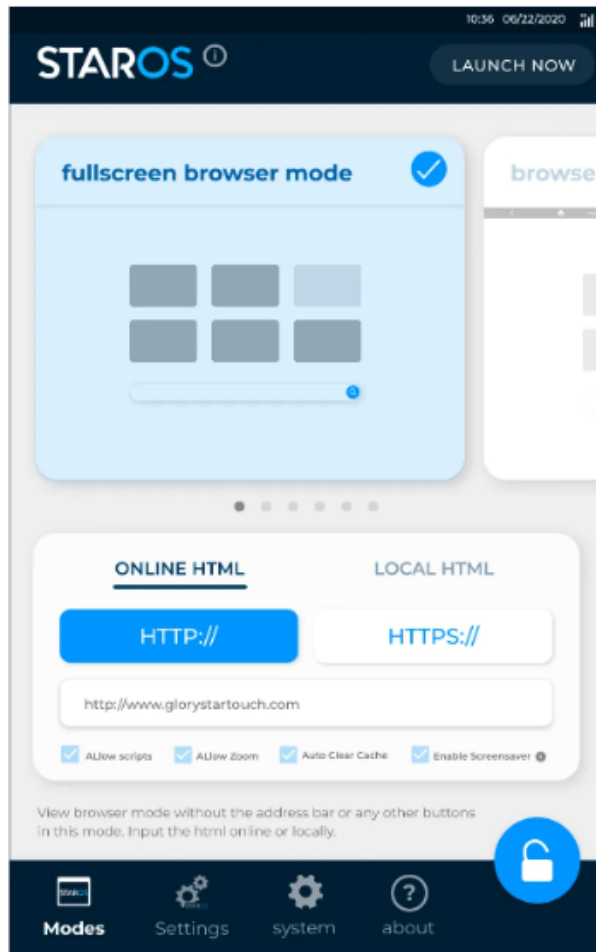


To display a website once the device is on lockdown, follow these steps:

1. Select **Modes**, scroll to the right, and then select **browser mode** to display the address bar or **fullscreen browser mode** to hide the address bar and navigation buttons.
2. Do one of the following:
  - Select **Online HTML**, and then add an external **Website URL**.
  - Select **Local HTML**, and then add a link to the HTML file in the local device.
3. Enable one or more of the following options:
  - **Allow Zoom** – allows user to zoom to the website
  - **Allow Scripts** – allows user to run custom scripts
  - **Auto Clear Cache** – removes unnecessary browsing data or history
  - **Enable Screensaver** – enables the screensaver to run on the display.
4. Select **Launch Now** to display the website page.

## App Mode

To run a single app on the device, follow these steps:

1. Select **Modes**, scroll to the right, and then select **app mode**.

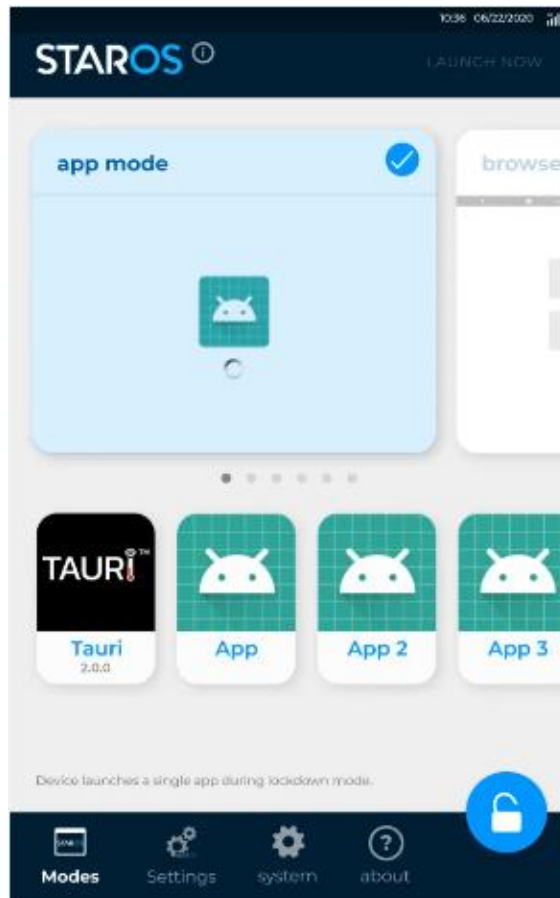


2. Select an app from the list.
3. Select **Launch Now** to enable the app.
4. Enter the login details of the app.


## Multiple Apps Mode

To enable multiple apps on the device, follow these steps:

1. Select **Modes**, scroll to the right, and then select **multiple apps mode**.

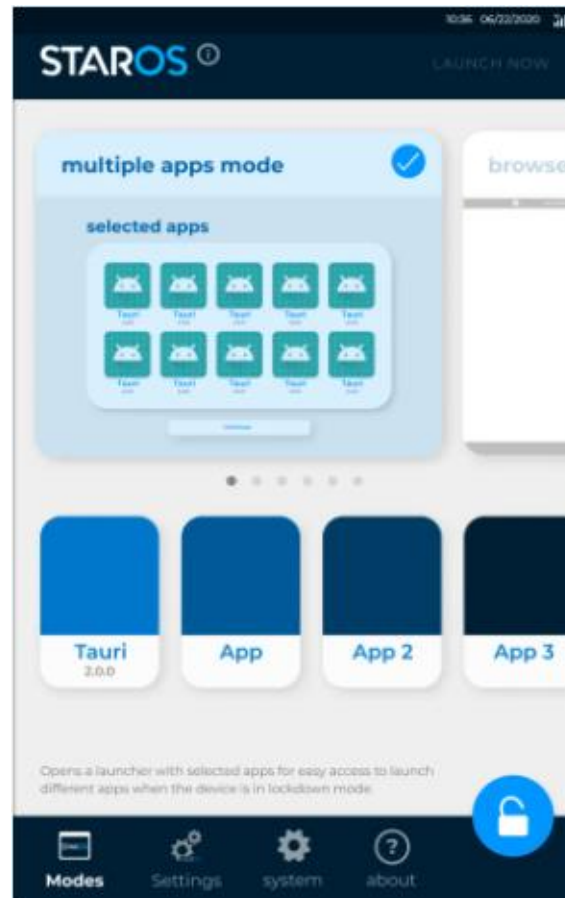


2. Select apps from the list.
3. Select **Launch Now** to enable the apps.

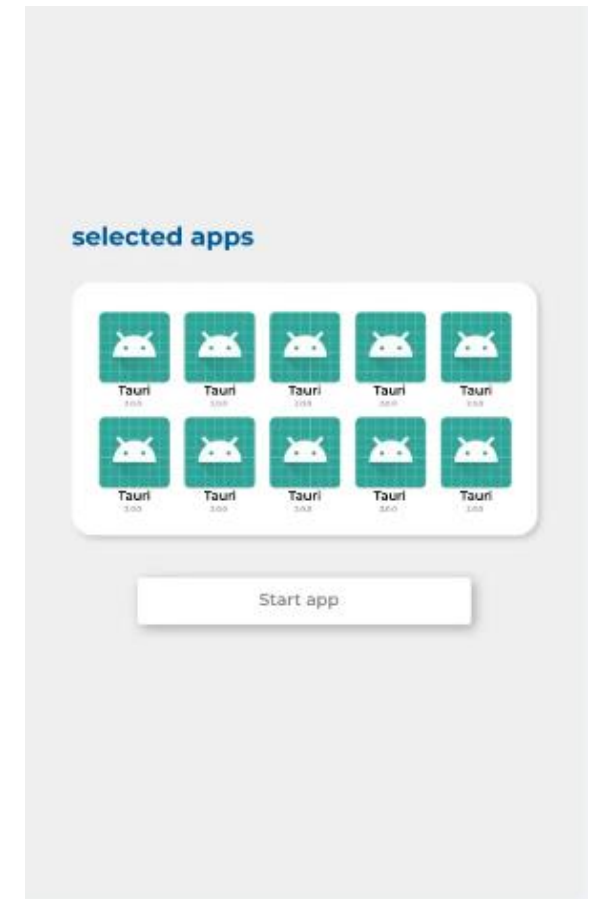

4. To run an app, select an app from the list of selected apps, and then select **Start app**.

# CONFIGURING THE DISPLAY SETTINGS

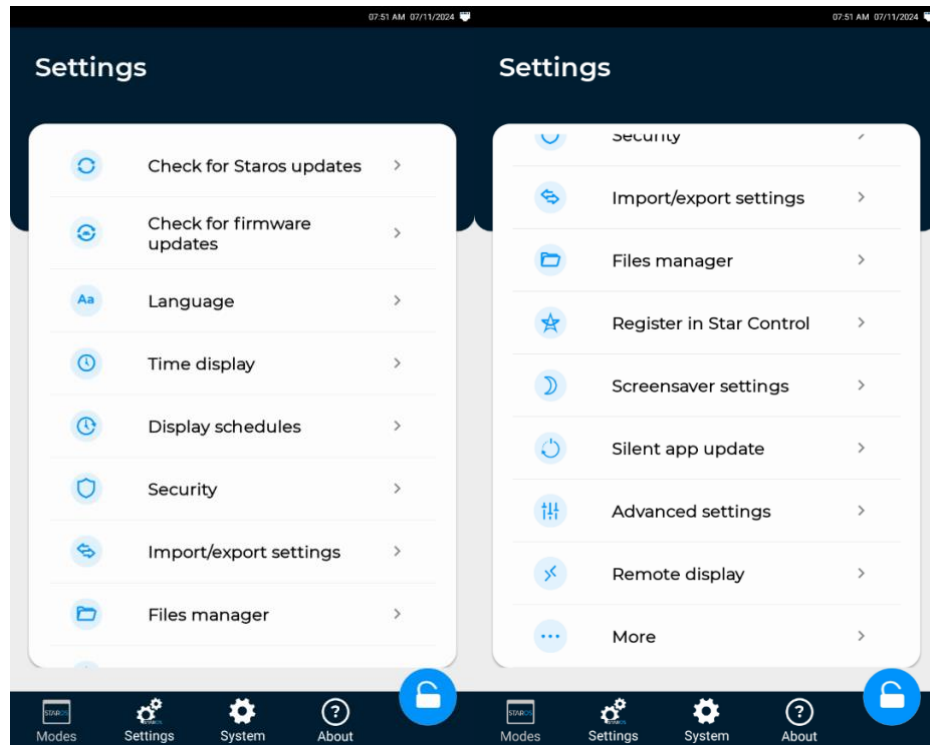


Configure the display settings by performing the following tasks:

- Install Staros updates
- Install device firmware updates
- Select the language to use in the device
- Import or export photos or videos
- Set the time to display
- Install apps or APK files
- Schedule device startup and shutdown
- Register device to Star Control
- Create admin account
- Update PIN
- Display a screensaver
- Unlock Staros
- Update apps
- Set Timeout to Initiate Star Control
- Revert to Android Settings
- Remote display on StarControl
- Install Star Tool


## Installing Staros Updates

To install Staros updates, follow these steps:

1. Select **Settings** → **Check for StarOS updates**.
2. If an update is available, select **Download and Install**.

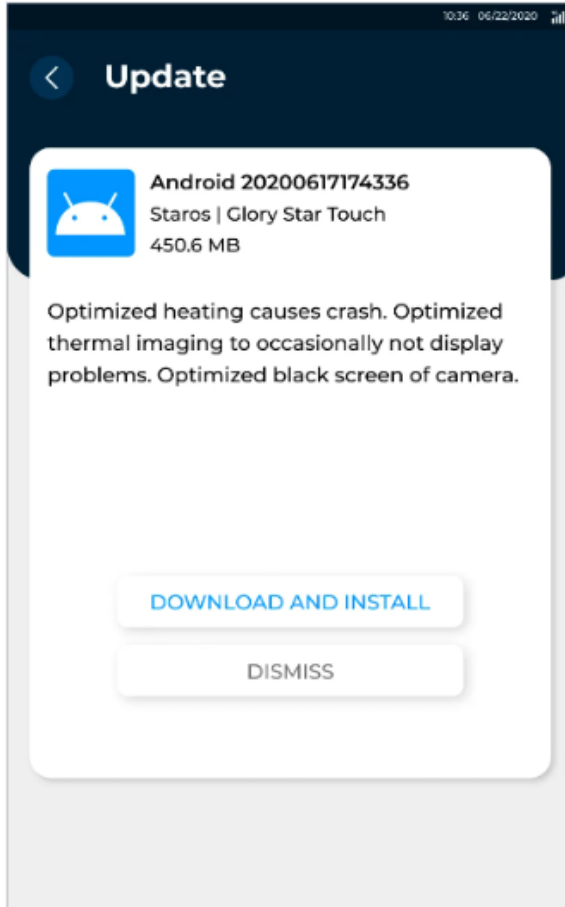


3. After the update has been downloaded, select **Install Now**. The display is automatically restarted after the installing the update.

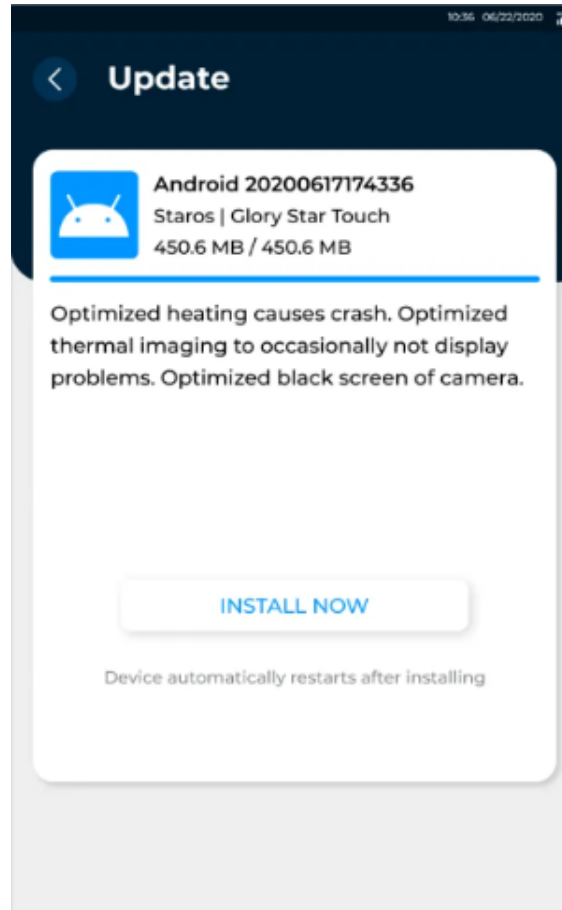

## Installing Firmware Updates


To check for firmware update, select **Settings** → **Check for firmware updates**.

If an update is available, select **Yes** to install the update. The display is automatically restarted after installing the update.

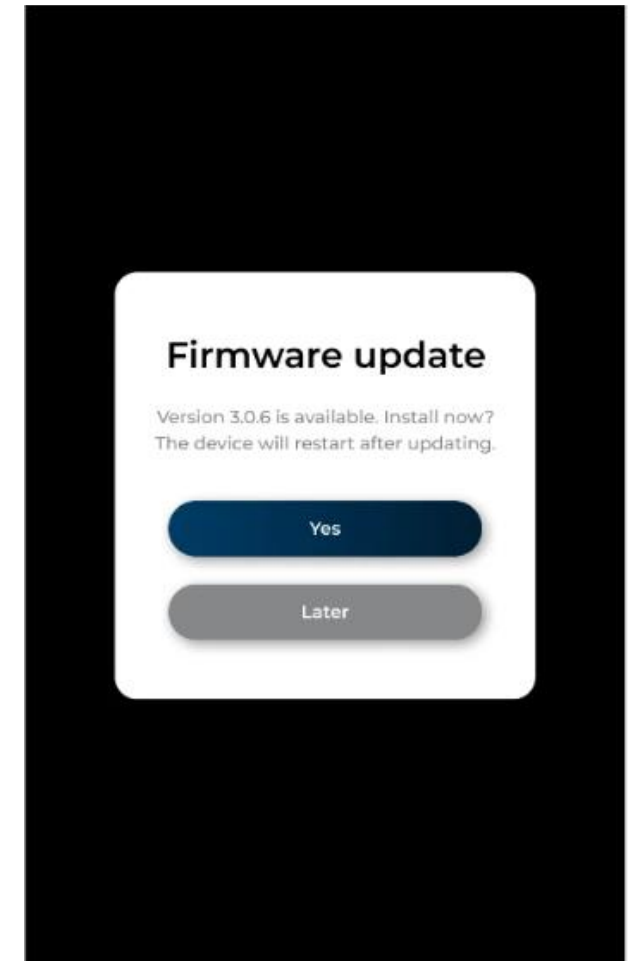

## Selecting a Language



To select a language for the display, select **Settings** → **Language**. Select a language from the list.

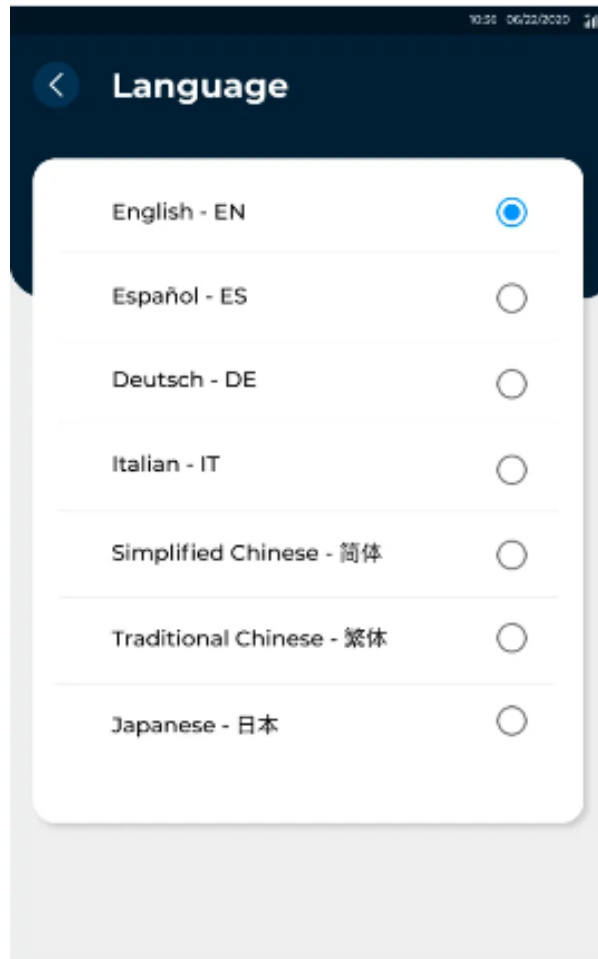

## Unlocking Staros

To unlock Staros, follow these steps:

1. Tap the bottom-right corner of the display four times, and then tap the locked icon. If the Unlock corner has been specified, tap the specific corner.
2. Enter the default **0000** PIN. If a PIN has been added, enter the **PIN**.

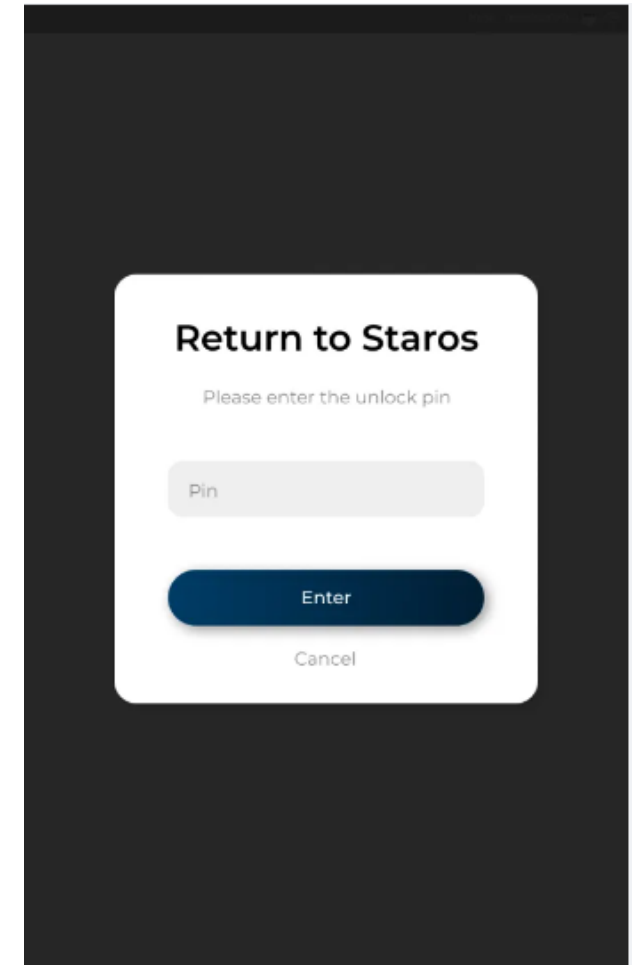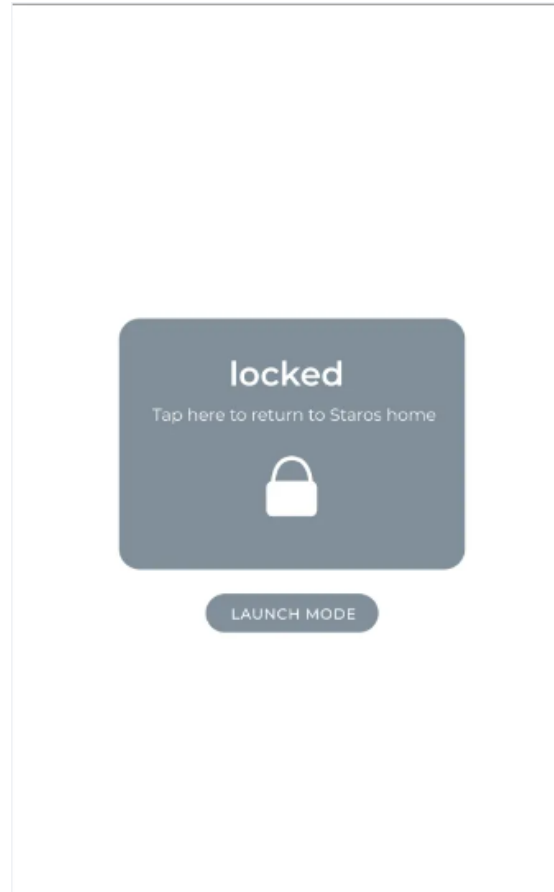





# Importing or Exporting Photos and Videos

To import or export photos or videos, follow these steps:

1. Select **Settings** → **Import/export settings**.
2. Select **Import** or **Export**.  
**NOTE:** When exporting files, the files are only downloaded to the Glory Star folder under the root directory.

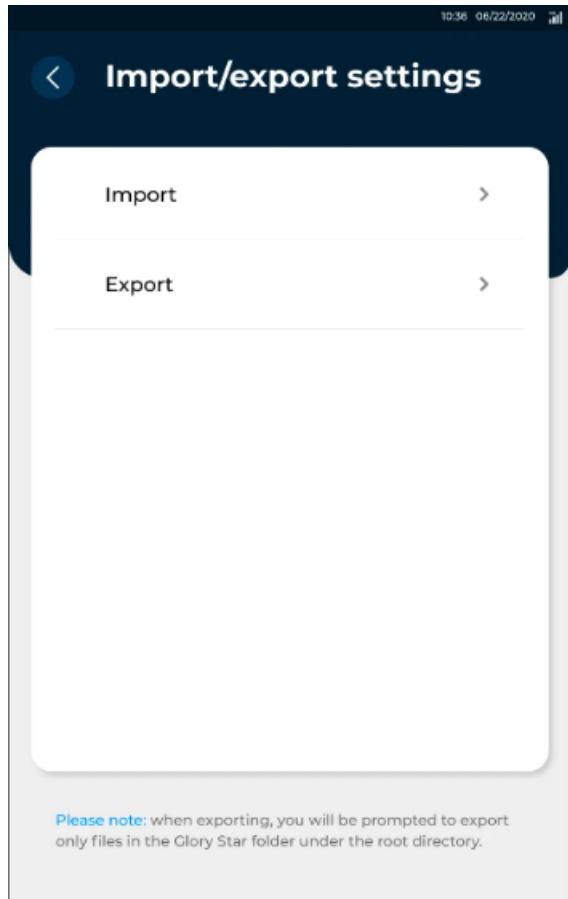


3. Select the storage device where the photos or videos are located.

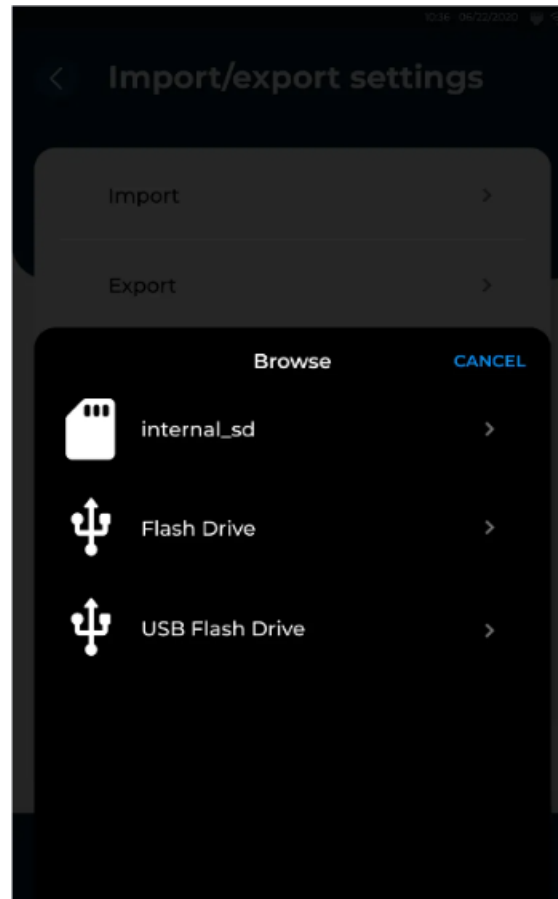

4. Select the files.

5. Select **Import** or **Export**.

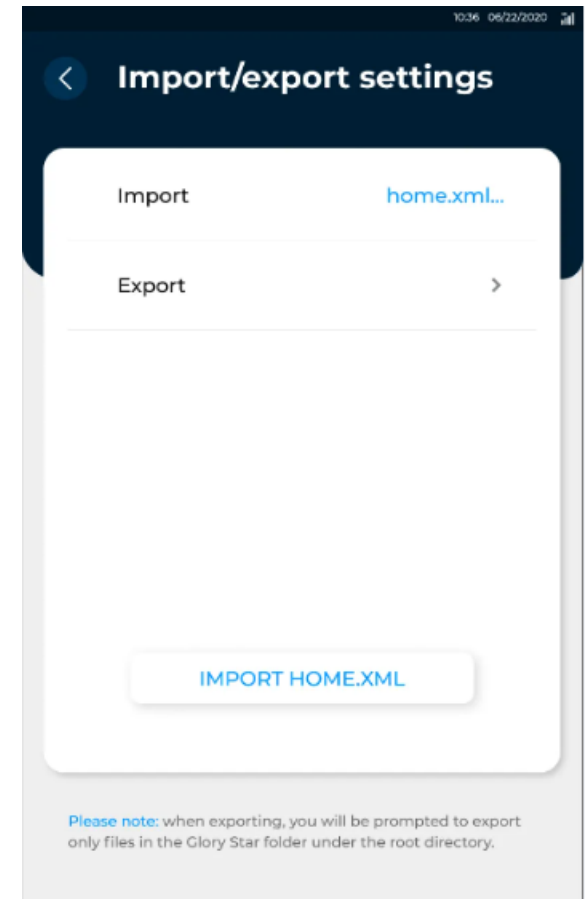


6. Select **Import Complete** or **Export Complete** if all files have been imported or exported.


## Setting the Time

To set the time in the display, follow these steps:


1. Select **Settings** → **Time display**.

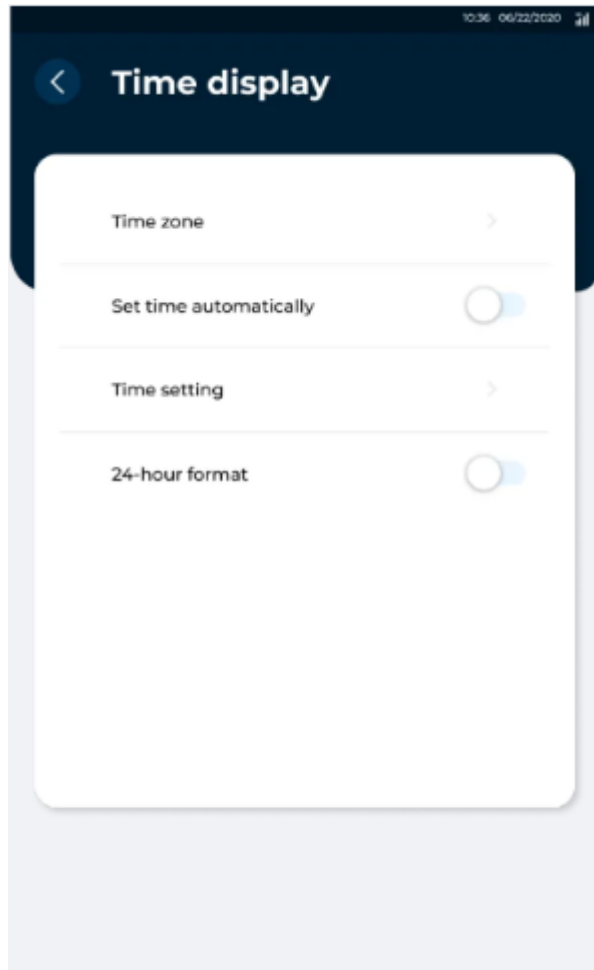


2. To set the time according to a time zone, select the time zone from the drop-down list.

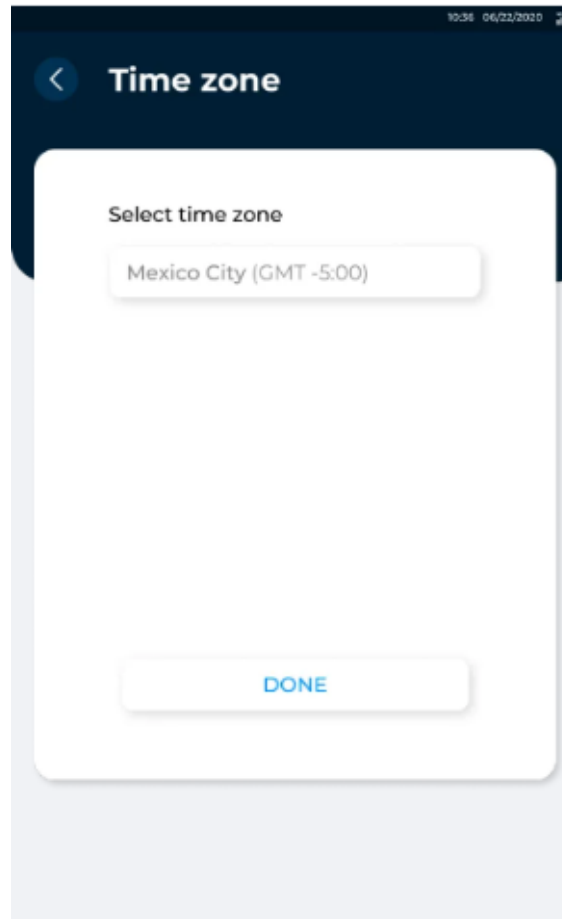

3. To set the time automatically according to the selected time zone, enable **Set time automatically**.

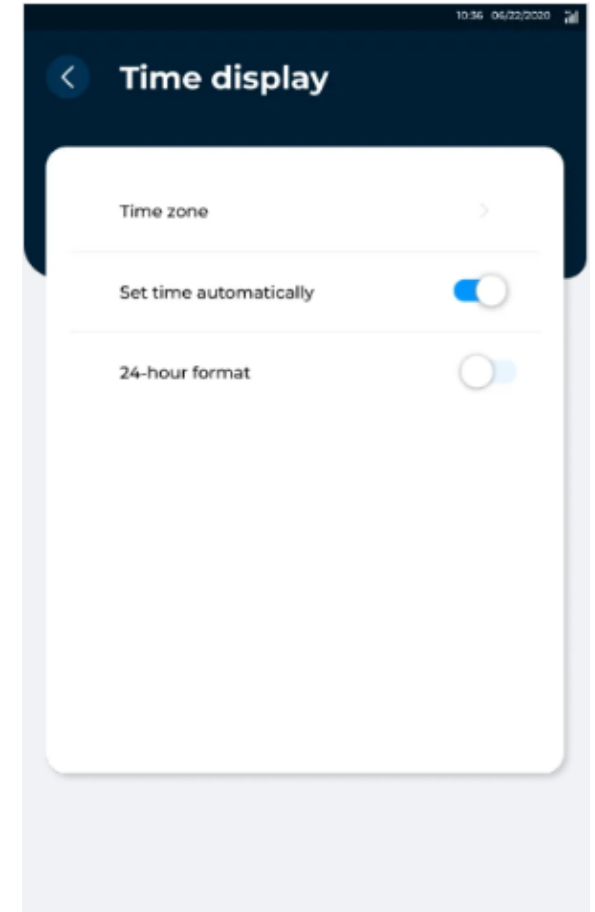


4. To manually set the time, select **Time setting**, and then select the **Date** and **Time**.

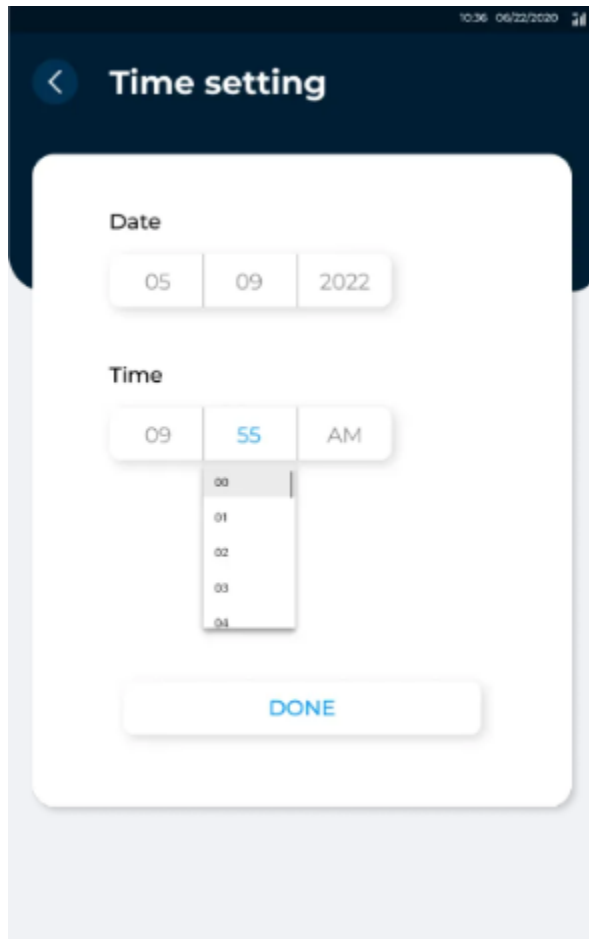

## Installing Apps and APK Files

To install an app or APK files, perform the following steps:

1. Select **Settings** → **File Manager**.
2. Enter the Admin **Username** and **Password**.

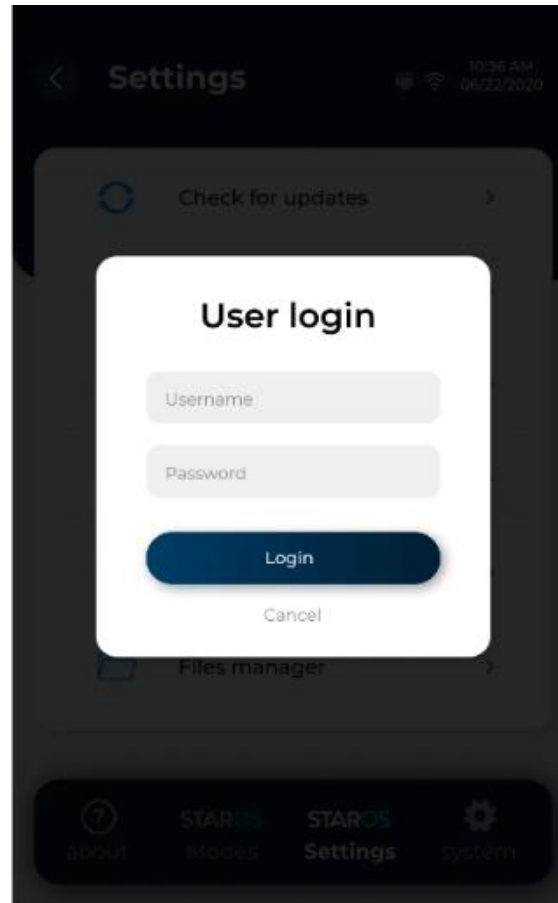


3. Select the USB or storage device where the files are located.
4. Click on the app you want to install.

## Setting Star Control Initiation Timeout

If the device is registered to Star Control, you can set the number of seconds for the app to initiate once the display turns on.


To set timeout, select **Settings** → **Advanced Settings**, enter the number of seconds. You can also enable **Allow StarOS updates**. Select **Save**.

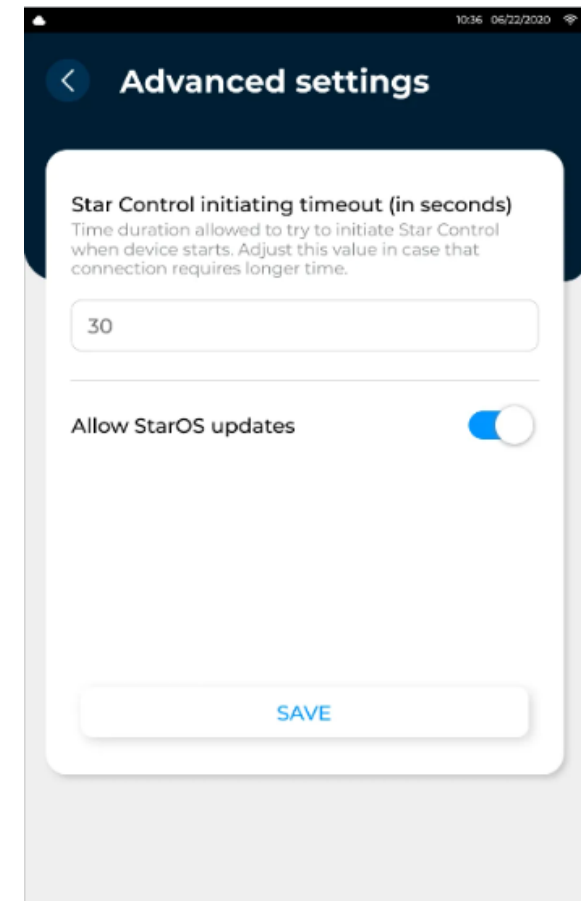


## Scheduling Display Startup and Shutdown

To set display startup and shutdown time, follow these steps:


1. Select **Settings** → **Display schedules**.
2. Select **+Startup and shutdown schedules** to add a new schedule.

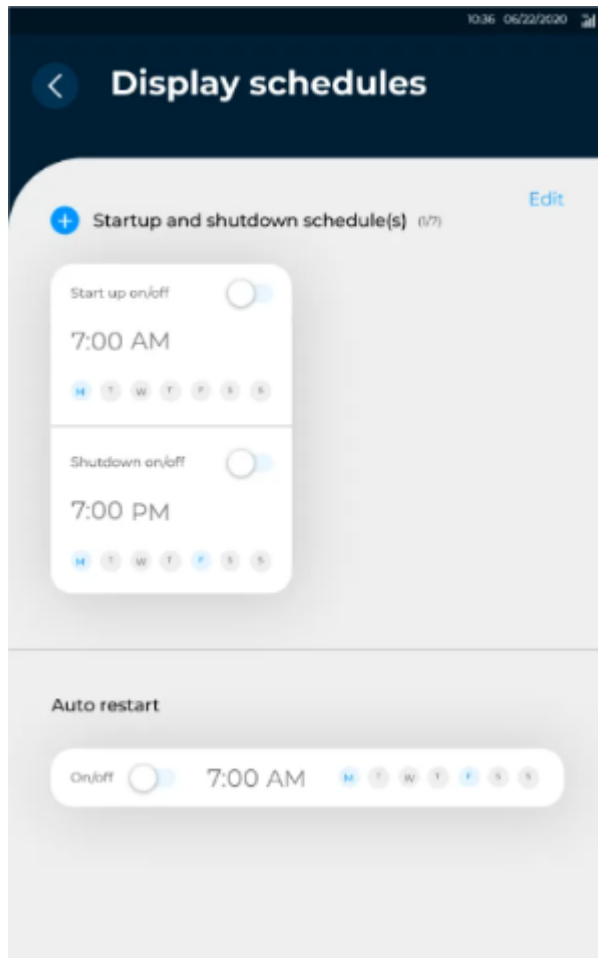


3. Enable the **Start up on/off** and **shutdown on/off** of the preferred schedule.

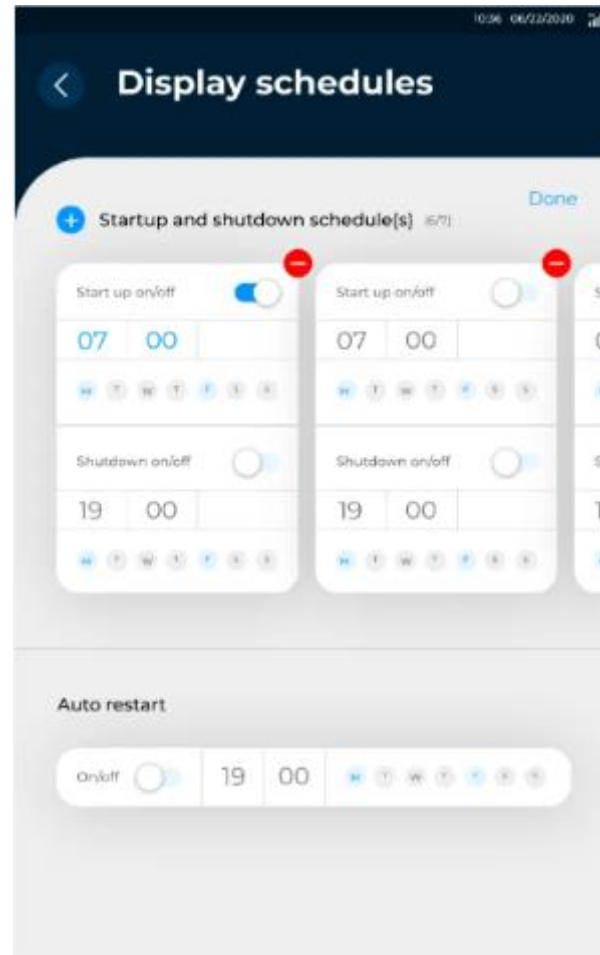


4. You can edit the time and days of each schedule.

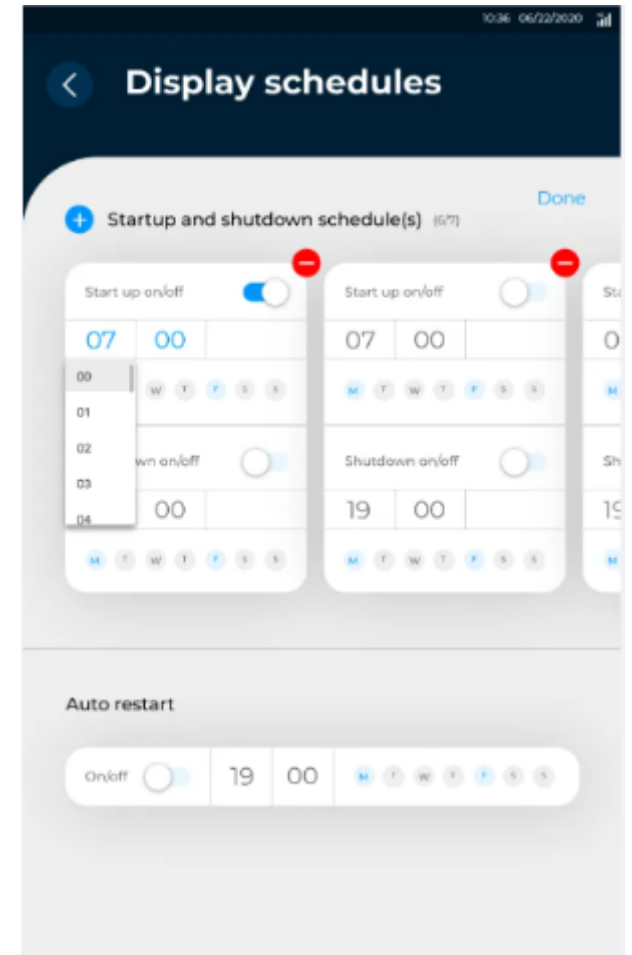


5. You can also set the time and date when to auto restart the display.

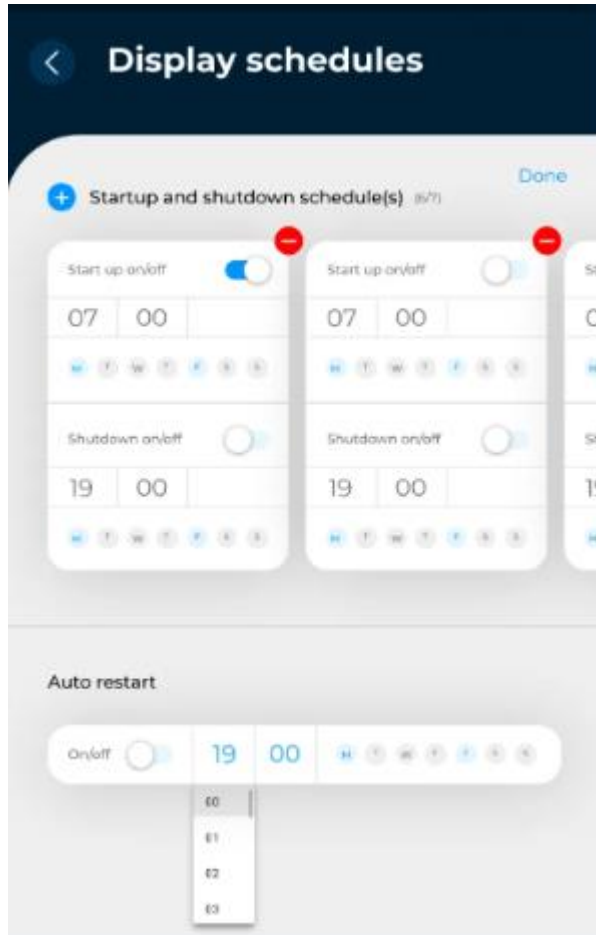

6. To remove a schedule, select the (-) icon of a schedule. Select **Yes** to confirm.

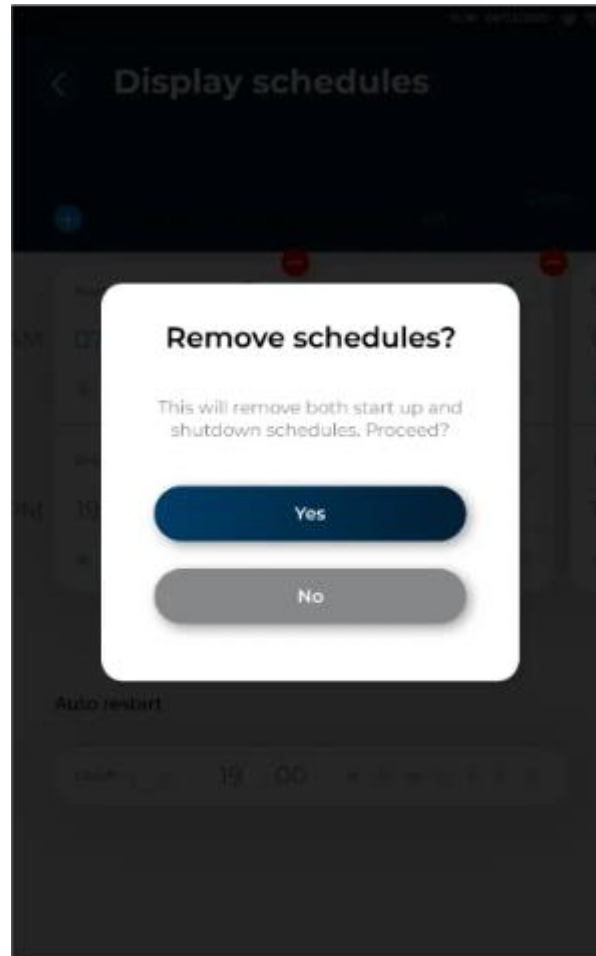

**NOTE:** The schedule is implemented according to the current order of the tablets of schedule.

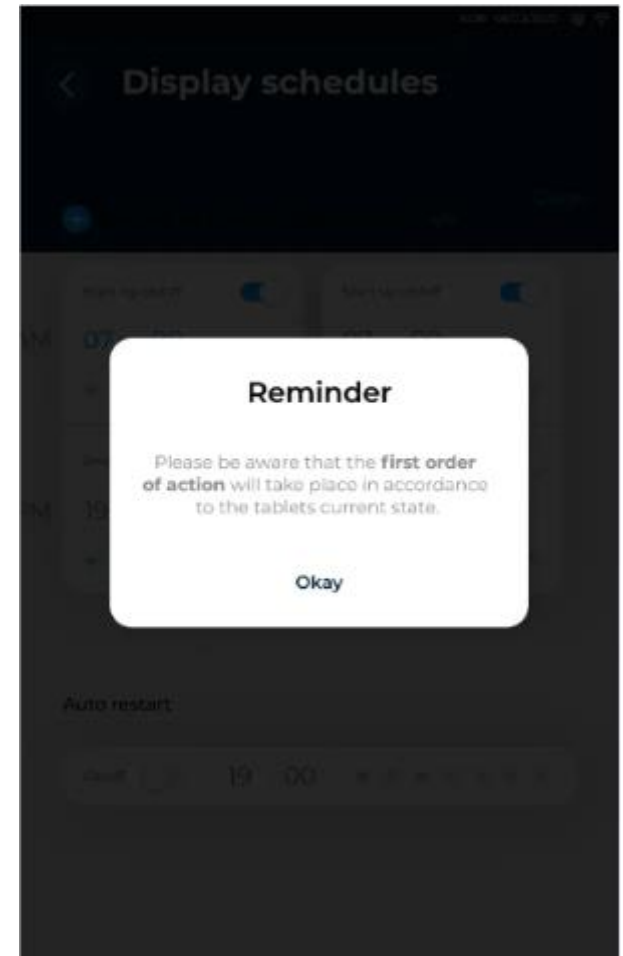


## Registering Device to Star Control

To register with PIN, ensure to generate a PIN first from Star Control.


To register with PIN, follow these steps:

1. Select **Settings** → **Register in Star Control**.
2. Select **Register with PIN** or **Register with Admin Login**.

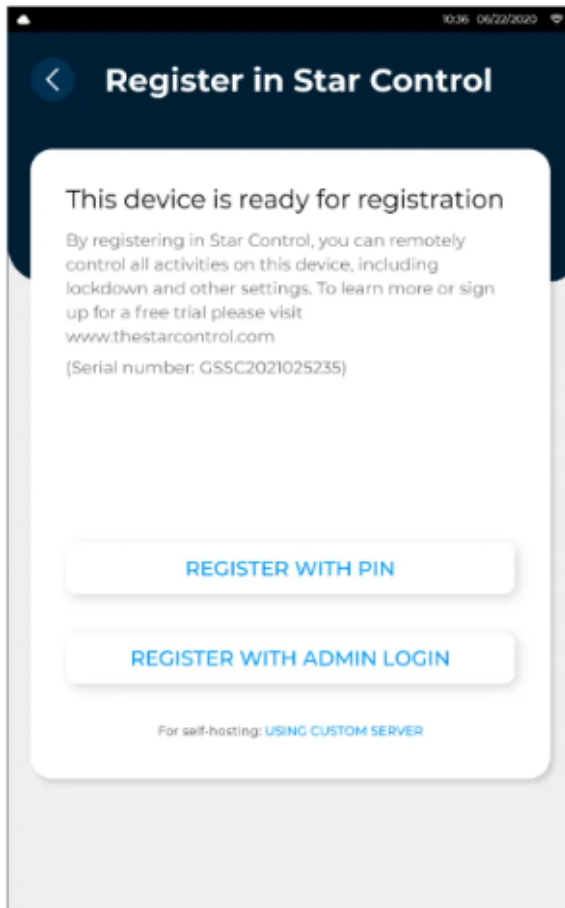


3. Do one of the following:

- To register with PIN, enter **PIN** generated from Star Control, and then select **Confirm**. Ensure that the display is connected to power while registering the device.

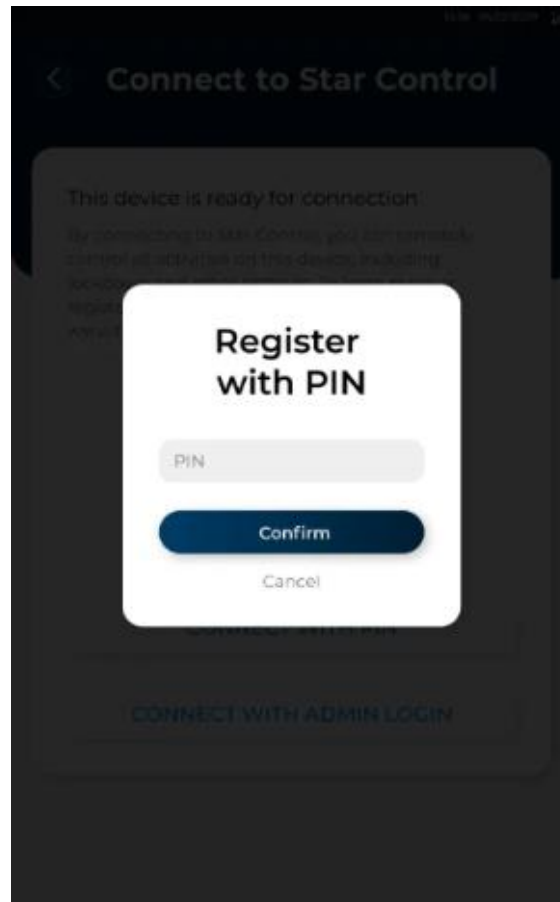


- To register with admin login, enter the **login email** and **password**, and then select **Confirm**. Ensure that the display is connected to power while registering the device.

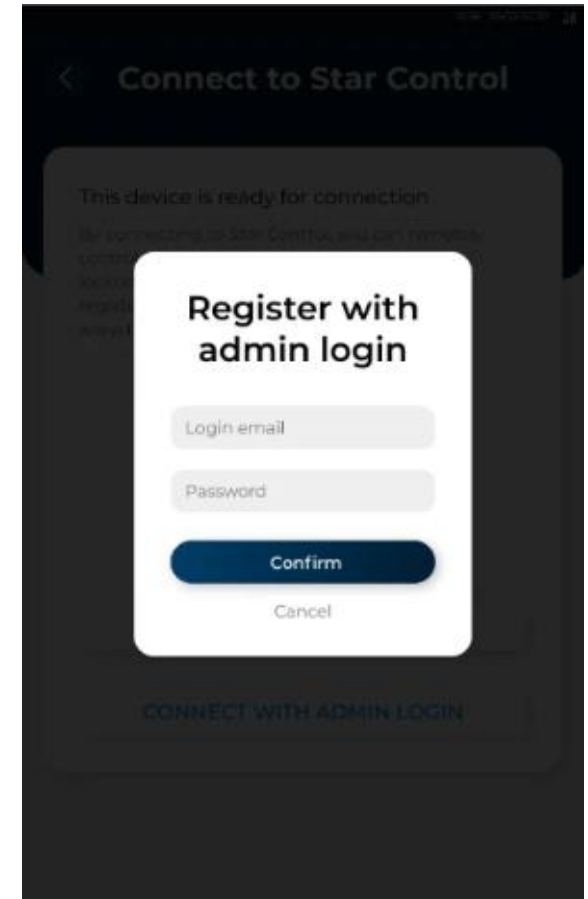

## Creating an Admin Account

To create an admin account, follow these steps:

1. Select **Settings** → **Security** → **User Account**.

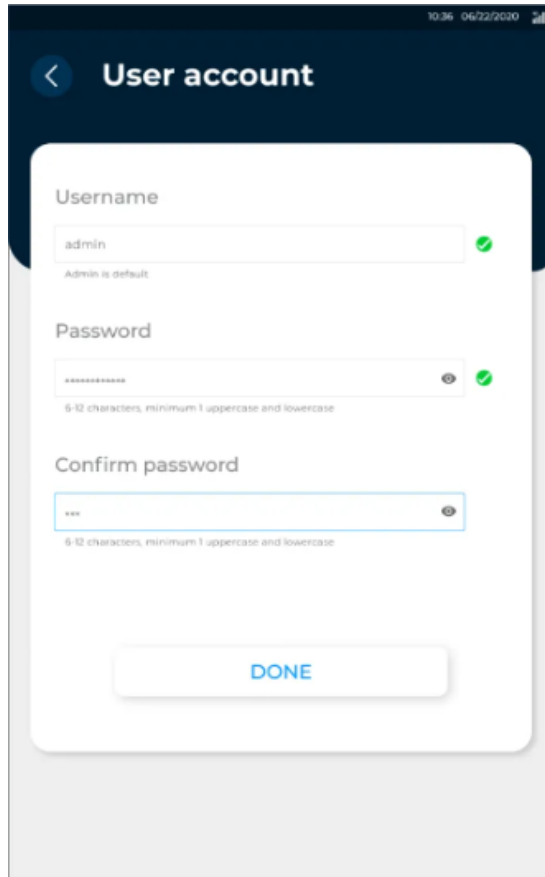


2. Enter a **user name**.
3. Enter a **password**. The password should be 6-12 characters long, with a minimum of 1 uppercase and lowercase.
4. Enter the **password** again to confirm.
5. Select **Done** to create the account.

## Updating PIN


To update the PIN to unlock the display, follow these steps:

1. Select **Settings** → **Security** → **Unlock PIN**.

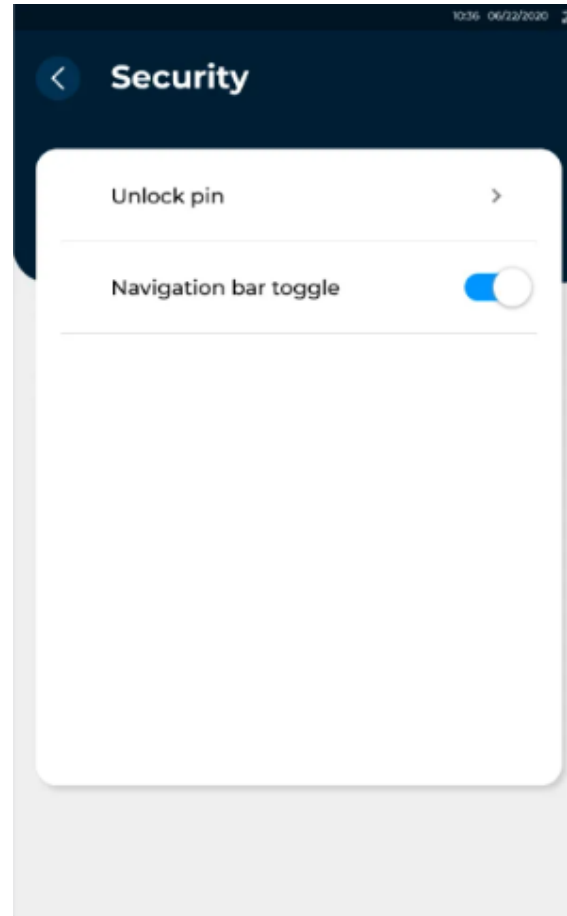

2. Enter the current **PIN**. The default PIN is 0000.

3. From the *PIN options*, select whether to use a 4-digit or 6-digit code.
4. Enter the new **PIN**.

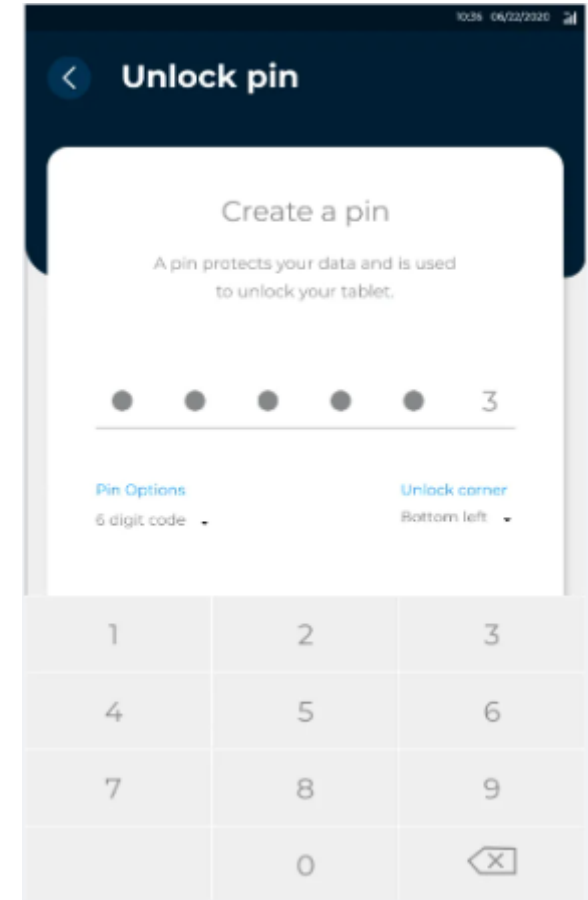


5. From the *Unlock corner*, select the corner of the display to tap to unlock the display.


## Displaying a Screensaver

To display a screensaver when the device is idle, follow these steps:

1. Select **Settings** → **Screensaver settings**.
2. Select the modes where the screensaver is to be displayed.

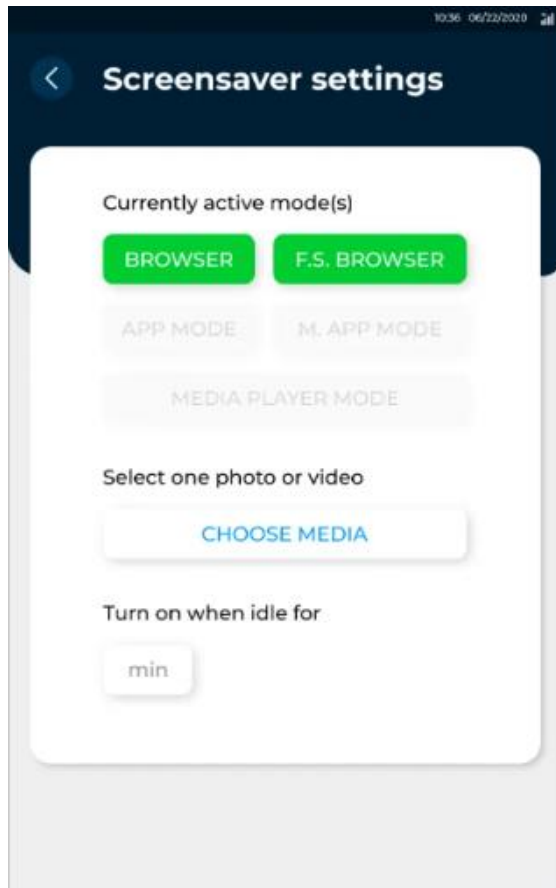


3. Select **Choose Media**, and then select the storage device where photos or videos are saved.

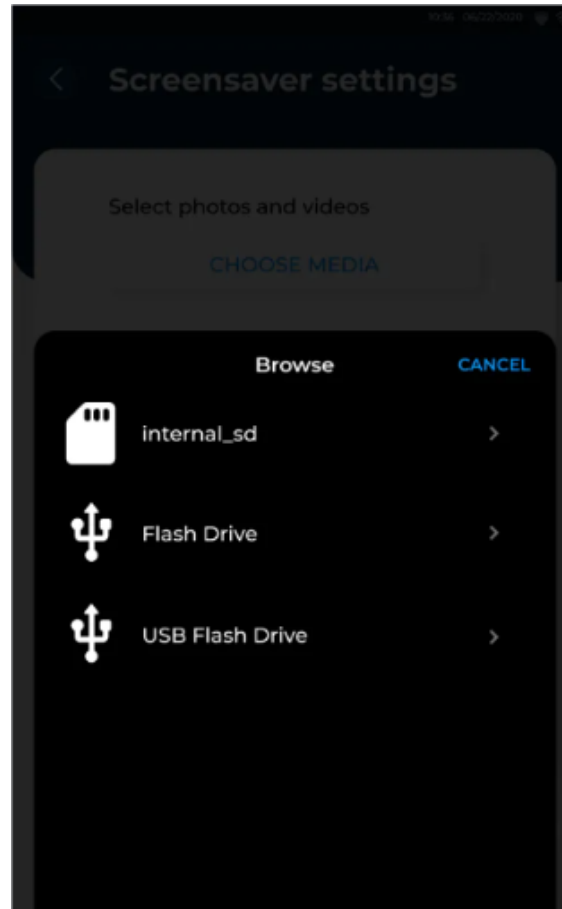

4. Select one or more photos or videos to add.

5. From the *Turn on when idle for* option, set the number of minutes the device should be idle before playing the screensaver.

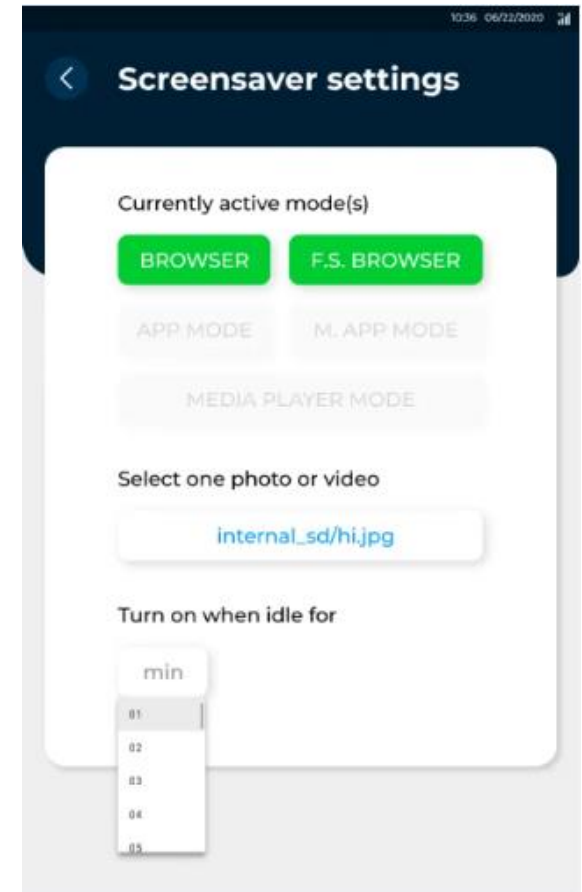





# Updating Apps

To automatically update currently installed apps if an update is available, follow these steps:


1. Select **Settings** → **Silent app update**.
2. Select **Enter app package name** or **Locate from installed apps** to select the apps to update.

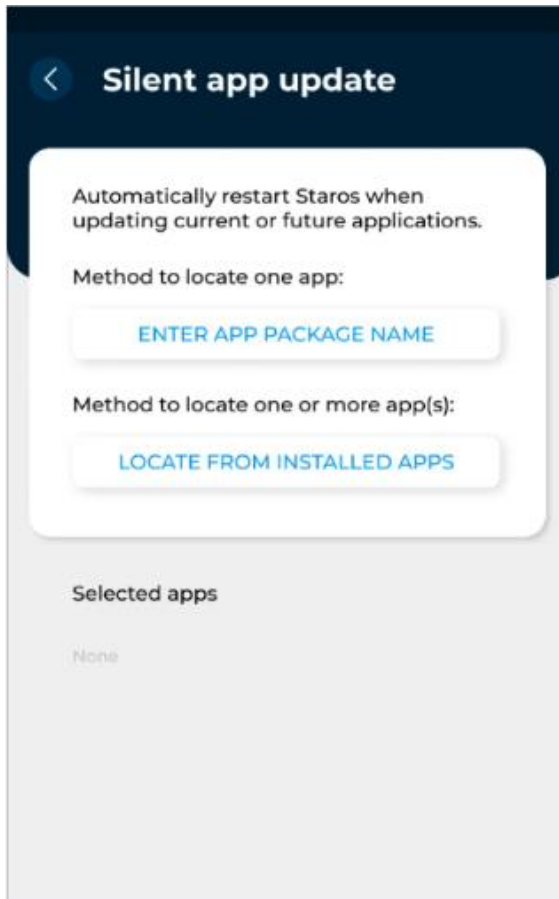

3. Enter the **app package name**, and then select **Save**.

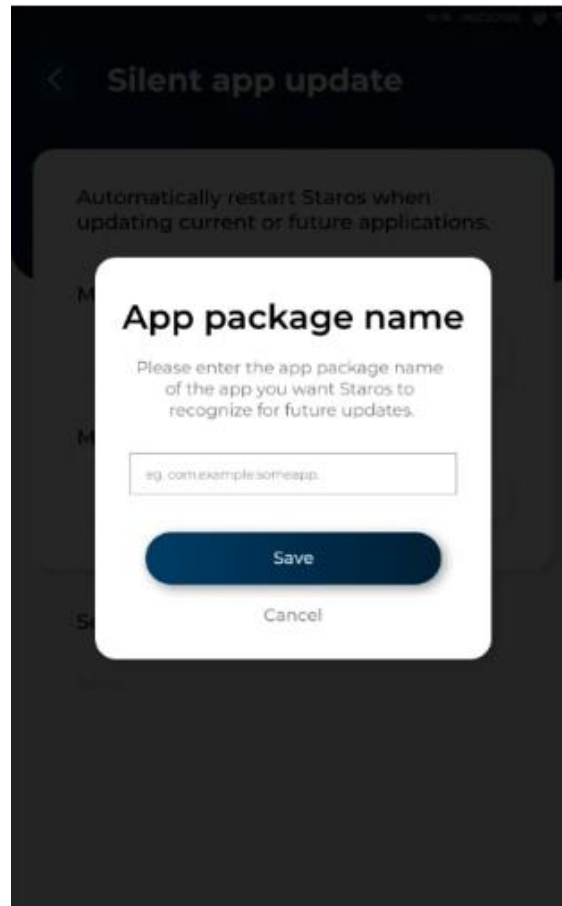

4. Select one or more apps from the list to update, and then select **Save**. The selected apps are displayed.

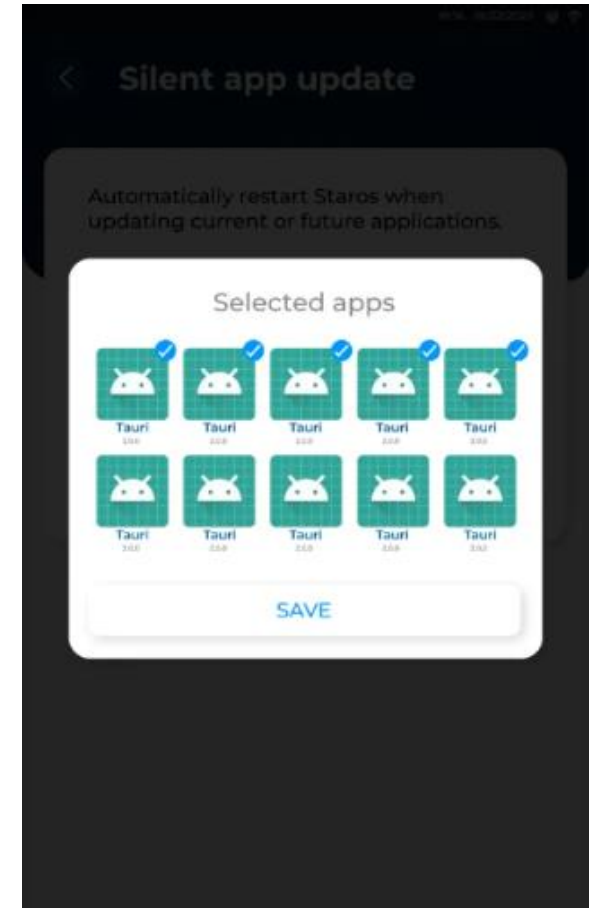


5. To remove an app from the list, select (-) icon, and then select **Save**.

# Removing Staros


To remove the Staros app and revert to Android settings, follow these steps:

1. Select **About**.

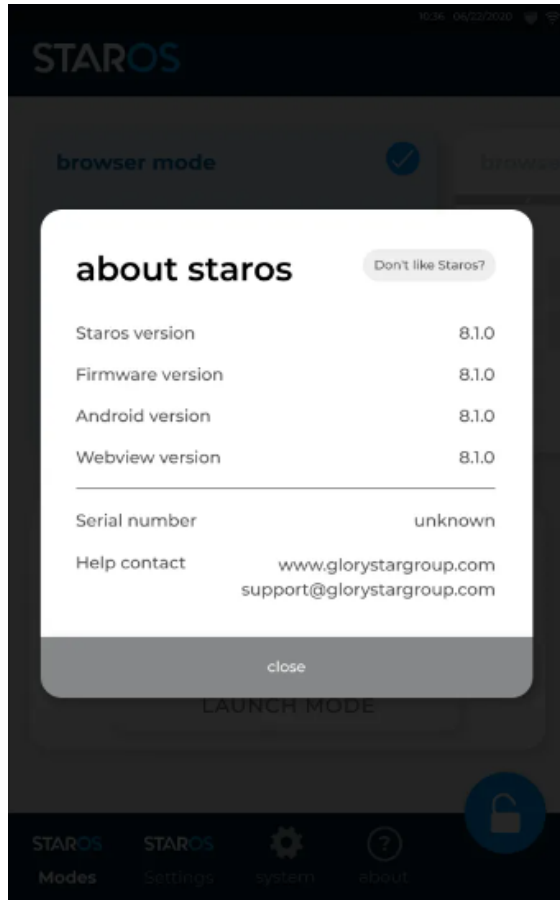


2. Select **Don't like Staros?**

3. Select **Yes, remove Staros**.

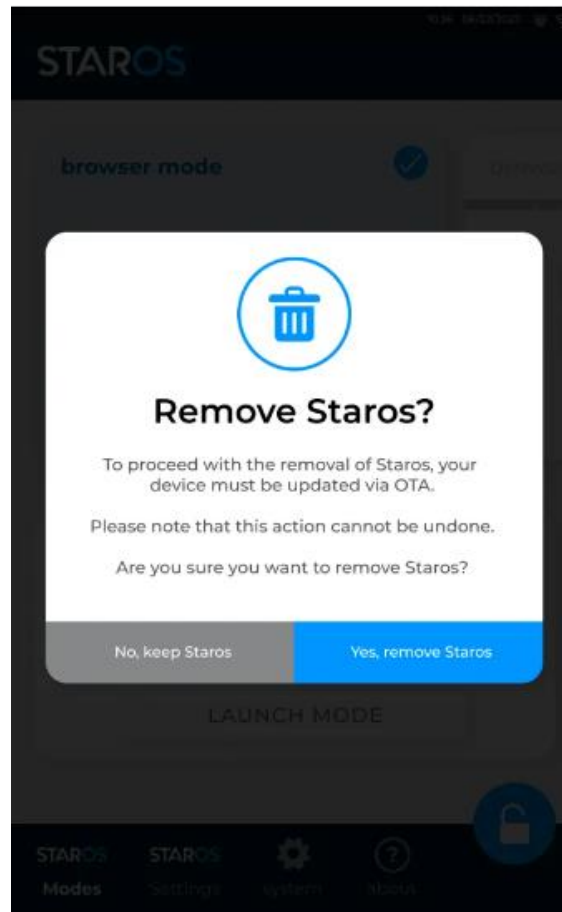


4. Enter the admin **password**, and then select **Remove Staros** to complete the removal of the Staros app.

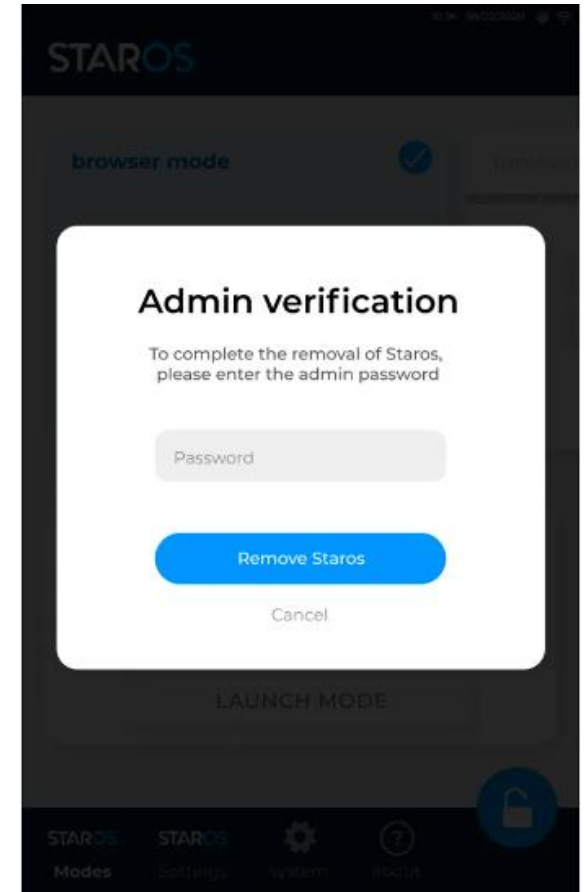

## Installing Star Tool

To install Star Tool, follow these steps:

1. Select **Settings** → **More** → **Star apps**.
2. Search for *StarTool*, and then select **Download and Install**. The app will begin to download.


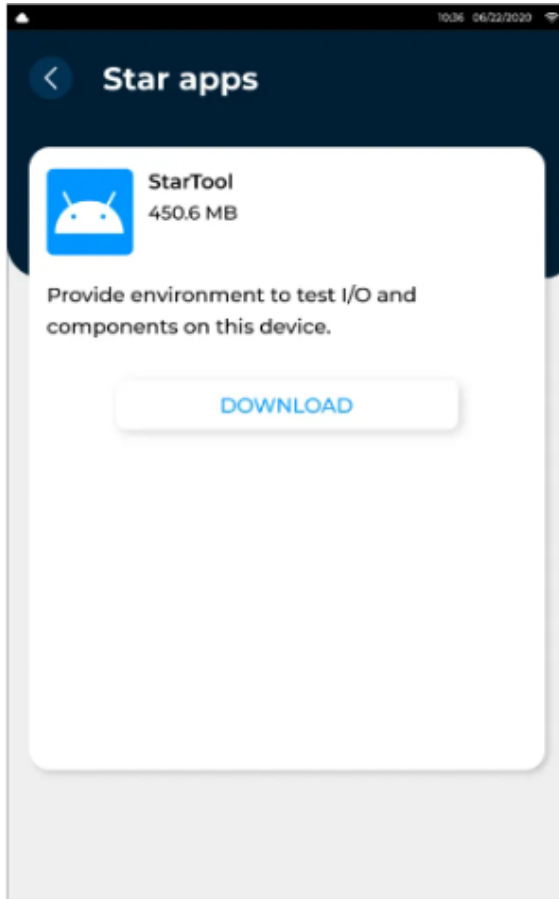


3. Select **Enter** to open the app.

## Enabling Remote Display

To enable remote control of the display, follow these steps:

1. Select **Remote Display** → **Start**. The system automatically generates a PIN.

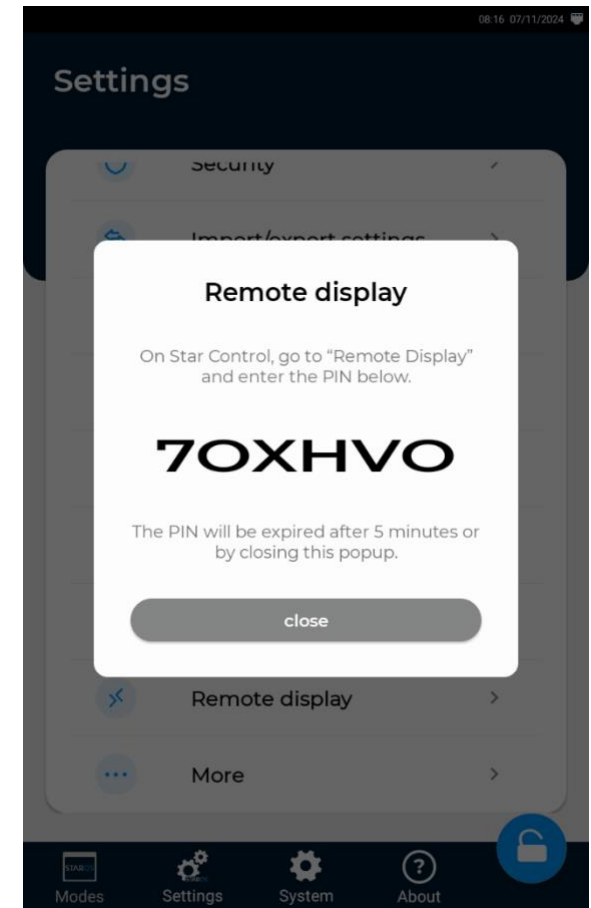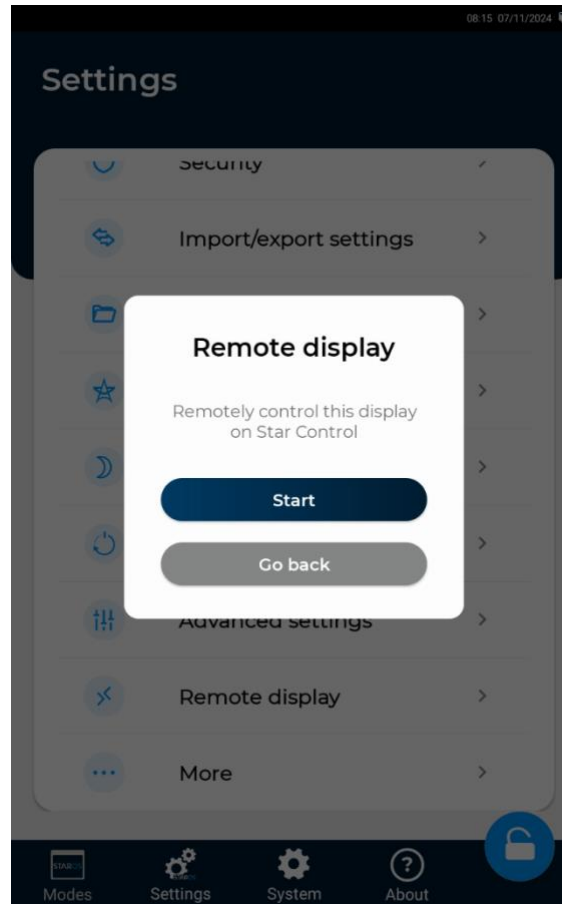

2. From StarControl, select **Support** → **Remote Desktop**.
3. Enter the **PIN**.

## CONTACT US

United States	Hong Kong	ShenZhen
1440 N. Harbor Blvd Suite 900 Fullerton, CA 92835, USA	Flat D, 5/F, Excelsior Building, 364 Nathan Road, Kowloon, Hong Kong	Bldg 9, 4/F Zhong Yuntai Technology Industrial Park, Tangtou No.1 Road, Shiyan Street, Baoan, ShenZhen, PRC
626 228 5927	852 23762803	86 755 2600 1808
<a href="mailto:sales@glorystargroup.com">sales@glorystargroup.com</a>	<a href="mailto:sales@glorystargroup.com">sales@glorystargroup.com</a>	<a href="mailto:sales@glorystargroup.com">sales@glorystargroup.com</a>

To find out more about our extensive range of Glory Star solutions, go to <http://www.glorystargroup.com> , or call the office nearest you. For more information, please contact us at [sales@glorystargroup.com](mailto:sales@glorystargroup.com).

Glory Star reserves the right to change or update, without notice, any information contained herein; to change, without notice, the design, construction, materials, processing or specifications of any products; and to discontinue or limit production or distribution of any products. Glory Star, the Glory Star logo, STAR CONTROL and STAROS are either trademarks or registered trademarks of Glory Star Group Limited.

